


For hedge mowers and excavators 4.0-10.0 ton

The pruning shear can be applied to excavators and hedge mowers that have approximately a serial cutting head of a similar weight, considering for each model the maximum operating pressure and oil flow limit. It is suitable for cutting shrubs with a maximum diameter of 10 cm.

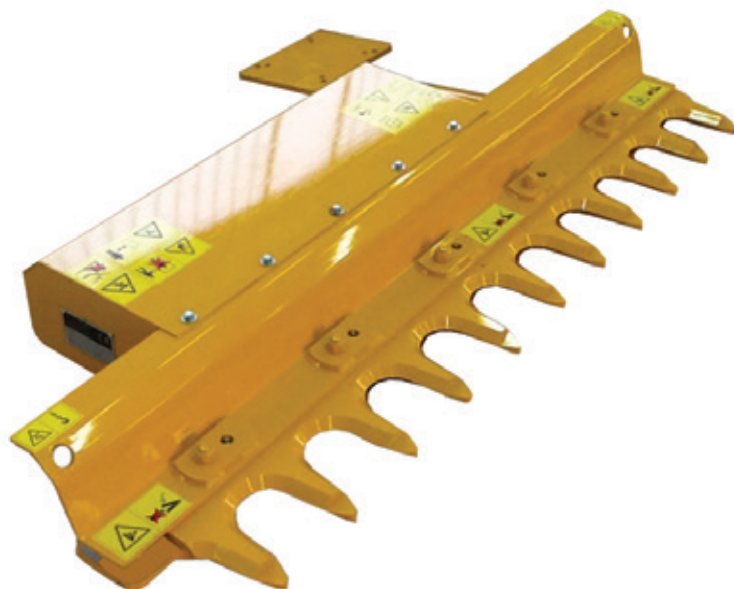

	BTZ5 15	BTZ5 18	BTZ10 16	BTZ10 19	BTZ10 22
Weight kg/lbs	210 463	220 485	240 529	265 584	290 639
Width cm/inch	150 60	180 71	160 63	190 75	220 87
Cut cm/inch	5 2	5 2	10 4	10 4	10 4
Max pressure bar/psi (min-max)	250 3.700	250 3.700	250 3.700	250 3.700	250 3.700
Max oil flow l/min - gal/min	60 16	60 16	60 16	60 16	60 16
Rev min	200	200	85	85	85

Technical features and standard equipment

- Mechanical tilt adjustment
- Hydraulic hoses 3/4" (L= 2.00 mt.)
- Under plate for mounting
- Low regulator valve 3/4" (max 100 lt.)
- Accident prevention protections according to EC directives

Accessories

- Mounting hitch (pins version) 1.2-4.0 ton / DOC101-201-202
- Pins kit 1.2-4.0 ton
- Quick hitch 1.2-4.0 ton
- Mounting hitch (pins version) 4.1-8.0 ton
DOC 303-302-400-500-600-VFR
- Pins kit 4.1-8.0 ton
- Quick hitch 4.1 - 8.0 ton
- Mounting hitch (pins version) 8.1-12.0 ton
- Pins kit 8.1-12.0 ton
- Quick hitch 8.1 - 12.0 ton