

ST

ST 780H PULL TYPE



Rotary tedder



ST

ST 780H PULL TYPE

Rotary Tedder ST, ideal machine to spread.




The ST 780H, 6 rotors, pull type, hydraulic lift tedder is the ideal machine to spread, air and turn all types of forage on all types of terrain. **You get a perfect and even spreading of forage.** All operator's controls are hydraulically carried out from the tractor cab.

Our tedder allows a working width of 26' and 5" it is the answer to the growing demand of modern and efficient tedders suitable for faster work rate in large areas. The machine is equipped with wide-angle driveline that allows an angle of 80° to turn rapidly on sharp bends during reversing .

During working the carrier for road transport is hydraulically raised over the machine.

For road transport the carrier is lowered and at the same time the outer rotors are raised to reduce the overall width and keep the unit lifted from the ground of 4".

Furthermore, the stability of the machine during working is ensured by tandem axles with balloon tires fitted underneath the centre rotors. Thus, the stress is evenly distributed and the tedder follows the undulations of the ground.

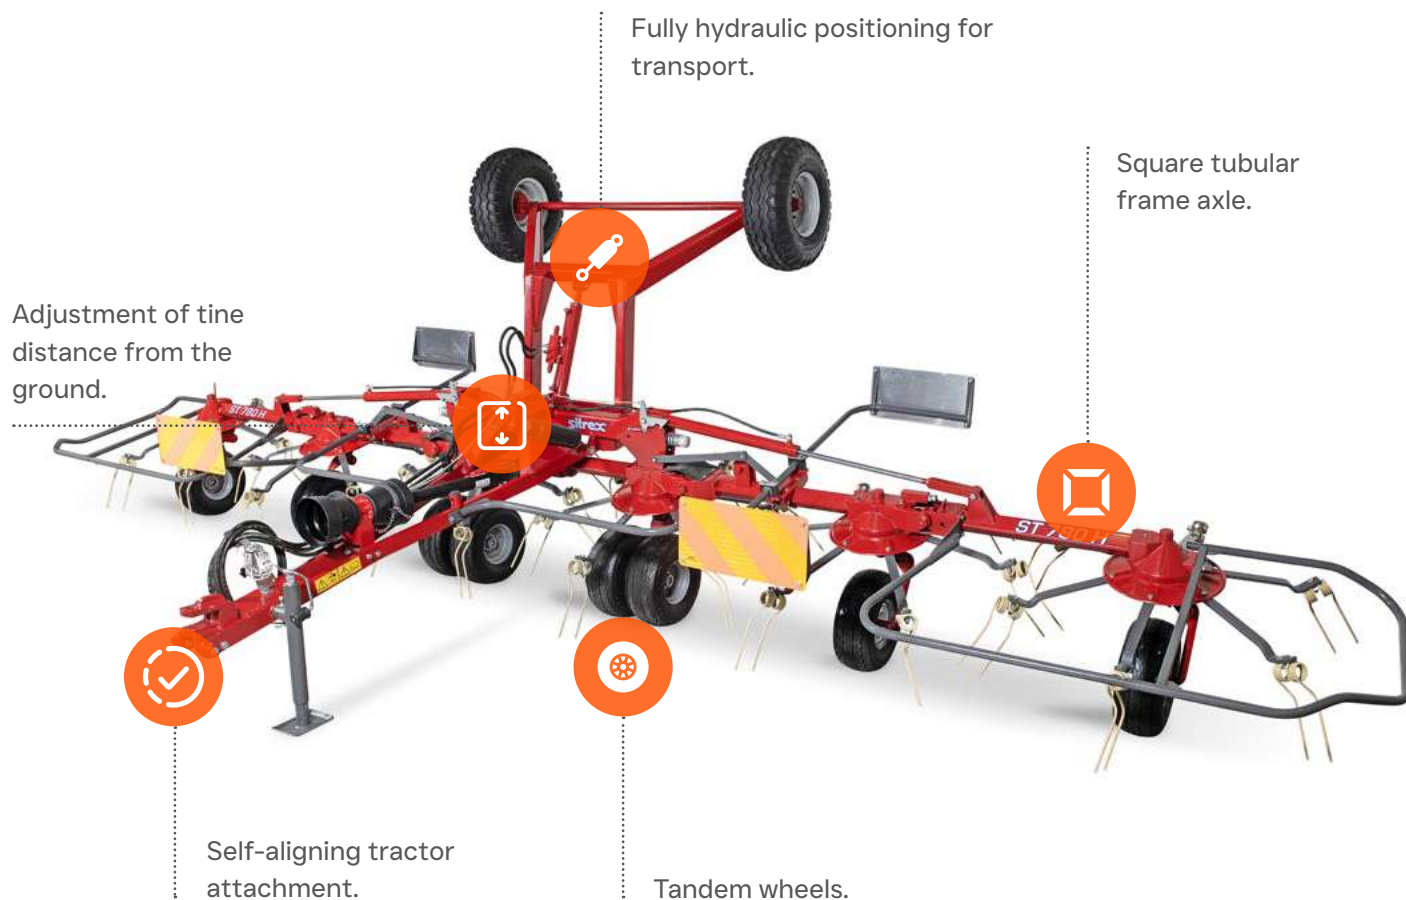

Specifications	ST-780H
Working width	25' 7" - 7.8 m
Weight	2470 Lbs - 1120 kg
Power required	50 HP - 70 kW
Rotors	6
Number of arms per rotor	6
Maximum width	26' 5" - 8.05 m
Width in transport position	9' 10" - 3 m
Length during work position	10' 4" - 3.15 m
Hydraulic requirement	2500 PSI
Number of revs during work	350-450 rpm
Working tyres	16 x 6.50 - 8
Transport tyres	205/70-R15



Designs, materials and/or specifications are subject to change without notice and without liability thereof.

Your partner in farming



Organization with certified Management System ISO 9001

Viale Grecia, 22 - 06018 Trestina (PG) - ITALY | **Phone:** +39 075.854.00.21 | **Email:** sitrex@sitrex.it | **www.sitrex.com**