



**ANNOVI[®]
REVERBERI**
The Power of Experience



FOAM GUN 50.100


FOAM GUN 50.100



COD.	MAX WORKING PRESSURE	MAX WORKING FLOW		STANDARD NOZZLE
	bar	l/min		mm
53104	100	50	G 1/2"M	Ø 4,5

The ANNOVI REVERBERI **FOAM GUN 50.100 lance** is a precision tool designed for professional firefighting.

The FOAM GUN is engineered for **firefighting applications** and it is **fully compatible with skid-mounted units** on pickup trucks. The **4.5 mm nozzle** ensures an optimal balance between range and area coverage.

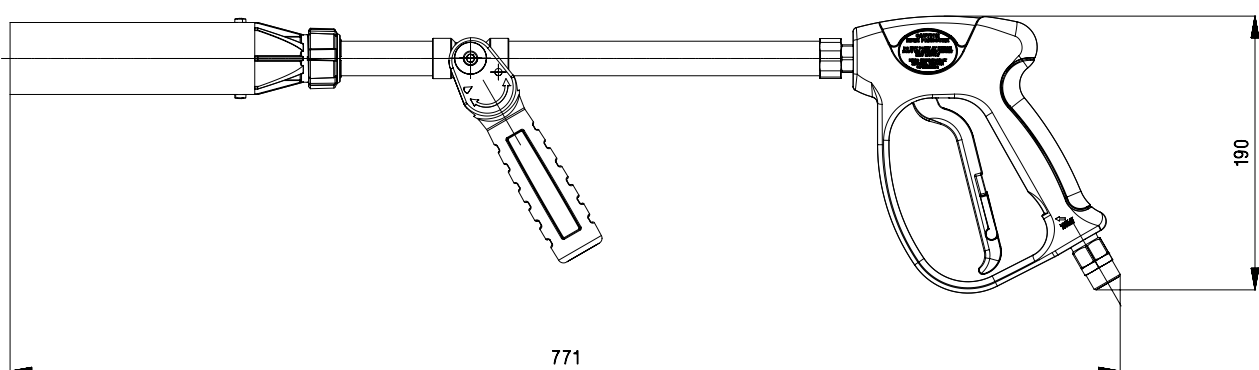

WATCH THE VIDEO:

Functional Test

Why watch the video?


"3-in-1 Fix System" in action

Range Test

Foam Quality



Functions

The FOAM GUN 50.100 features a **3-mode locking selector** that provides a key operational advantage over conventional models.

Needle Jet (straight stream) Long Range	Cone Spray Shielding	Wide Diffuser Foam Mode
Maximum range and impact power.	Creates a shield of finely atomized water.	Activates the venturi system for air intake.
		

Standard nozzle: Ø 4.5 mm in nickel-plated brass

This size is the optimal configuration: it guarantees sufficient flow rate to fight wildland fires while maintaining high thrust pressure even with small/medium-sized firefighting modules.



		ø																Pack
56209	3.5	flow l/min	24.8	24	32	31	37.9	36.7	40.5	39.2	43	41.6	45.3	43.8	49.6	48	10	
		spray angle	-	40°	-	40°	-	40°	-	40°	-	40°	-	45°	-	45°		
		max range m.	12	4.5	13	6	14	7	7.5	15	15.5	7.5	16	8.5	17	9		
56210	4.0	flow l/min	30.2	29	39	37.5	46.1	44.4	49.3	47.4	52.3	50.3	55.2	53	60.4	58.1	10	
		spray angle	-	40°	-	40°	-	40°	-	40°	-	40°	-	45°	-	45°		
		max range m.	12.5	5	13.5	6.5	14.5	7.5	15.5	8	16.5	8	17.5	9	18.5	9		
56211	4.5	flow l/min	36.4	33.7	47	43.5	55.6	51.5	59.5	55	63.1	58.4	66.5	61.5	72.8	67.4	10	
		spray angle	-	45°	-	45°	-	45°	-	50°	-	50°	-	50°	-	50°		
		max range m.	13	6	14	7	15.5	8	16	9	17	9	18	9.5	19.5	9.5		
56212	5.0	flow l/min	41.8	40.3	54	52	64	61.5	68.3	65.8	72.5	69.8	76.4	73.5	83.7	80.6	10	
		spray angle	-	50°	-	55°	-	55°	-	55°	-	55°	-	55°	-	55°		
		max range m.	13.5	6.5	15	7.5	16.5	8.5	17.5	9.5	18.5	9.5	19.5	10	21	10		
56213	5.5	flow l/min	47.3	43.8	61	56.5	72.2	67	77.2	71.5	81.8	75.8	86.3	80	94.5	87.5	10	
		spray angle	-	55°	-	60°	-	60°	-	60°	-	60°	-	60°	-	60°		
		max range m.	14	6.5	16	7.5	17.5	9	18.5	10	19.5	10	20.5	10.5	22	10.5		
56214	6.0	flow l/min	52	47.2	67	61	79.3	72.2	84.7	77.2	90	81.8	94.8	86.3	104	94.5	10	
		spray angle	-	60°	-	65°	-	65°	-	65°	-	65°	-	65°	-	65°		
		max range m.	14.5	7	17	8	18.5	9.5	19.5	10.5	20.5	10.5	21.5	11	23	11		
56215	7.0	flow l/min	55.8	47.3	72	61	85.2	72.2	91.1	77.2	96.6	81.8	102	86.3	112	94.5	10	
		spray angle	-	70°	-	80°	-	75°	-	75°	-	75°	-	75°	-	75°		
		max range m.	15.5	7	18	8	19.5	9.5	20.5	11	21.5	11	22.5	12	24	12		



**ANNOVI[®]
REVERBERI**
The Power of Experience

Seguici su / Follow us on



Annovi Reverberi spa

Via Martin Luther King 3
41122 Modena (Italy)
Tel +39 059 414 411
Fax +39 059 253 505
infoar@annovireverberi.it
www.annovireverberi.it

AR North America Inc.

140 - 81st Avenue Northeast
Fridley, MN USA 55432
Ph. +1 763 398 2008
Fax +1 763 398 2009
info@arnorthamerica.com
www.arnorthamerica.com

AR China Distribution Co., Ltd

2nd Floor, Build. 1, No. 651 Jiangting Rd.
Jinhui Town, Fengxian District, Shanghai
201404 China
Ph./Fax. +86 21 54846800 ext 815
info@ar-china.cn
www.ar-china.cn

AR Latin America

Rua Jandaia do Sul 125, Pinhais
Curitiba, Brasil, CEP 83324-440
Ph. +55 41 3059-2748
info@arlatam.com.br
www.annovireverberi.com.br
www.arlatam.com.br