



Modular Fluid Controls



Key Points

Modular control units
ideal for various types of sprayers:
self-propelled, trailed or mounted.

Compatible with any electronic control systems

Rapid assembling

Flexible design

Wide range of accessories:
filters, ball valves, flow meters, sensors.

Customized solutions for each machine.

Flexible mounting.

100% tested.

Long life and reliability.

Ideal product to update every type of sprayer.

Applications




CROP
SPRAYING

Assembly Scheme

Double connection type:

AF Fork coupling
NRG flange

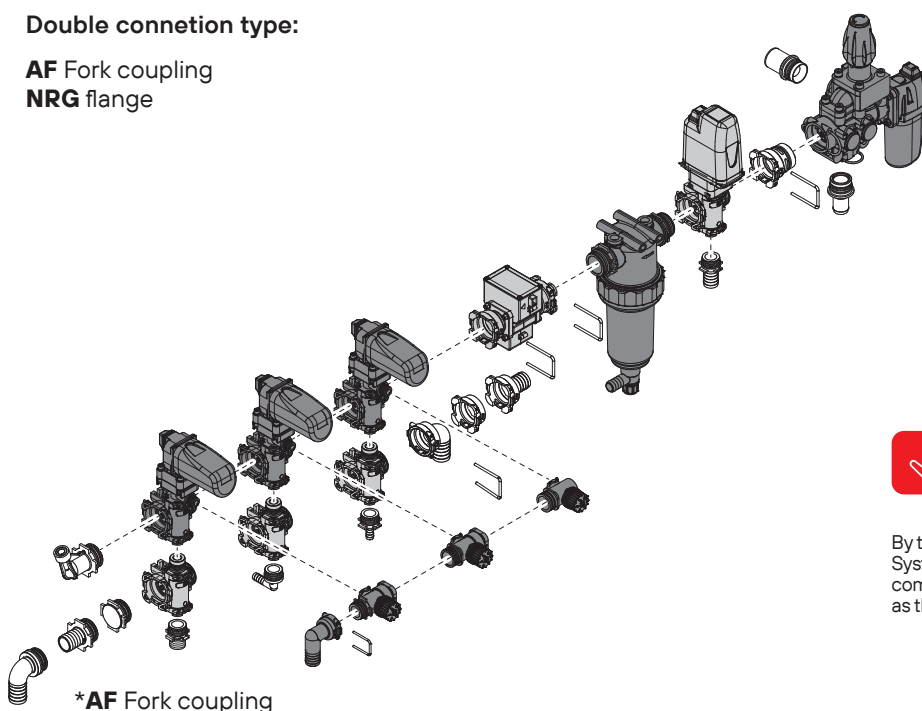

*AF Fork coupling

NRG
COUPLING



AF
COUPLING



By the **AF Fork Coupling**
System, it is possible to
combine each singular item
as the customer needs.



Medium & High Pressure



Key Points

Modular control units ideal for various types of sprayers and machines with medium and high pressure

Also available in brass, with solenoid section valve

Bolt assembling

Suitable to be connected to electronic control systems

Customized solutions for each machine

Flexible mounting

100% tested

Long life and reliability

Ideal product to update every type of sprayer

Features

Boom sections	up to 4	
Working pressure	1 ÷ 50 bar	14.5 ÷ 725 psi
Flow rate	up to 250 l/h	up to 66 USG pm
Working temperature	5°C ÷ 60°C	40°F ÷ 140°F
Power supply	12 Vdc	

Applications



ORCHARD
SPRAYING