

I giunti elastici della serie GU sono composti di 2 parti in metallo e un elemento elastico (senza tagli) e sono in grado di sopportare disallineamenti ed urti di elevata entità.


Di semplice installazione; è sufficiente avvitare le viti del mozzo sull'elemento elastico.

Come per la serie GUF, la serie GU è prodotta in sinergia fra Gummi e Meccanica Couplings (produttore dei mozzi).


GU Flexible couplings consist of 2 metal parts and one flexible element (a complete ring without cuts) that can withstand high impact and misalignments.

They are extremely easy to fit as you simply need to tighten the hub screws onto the flexible element


Both the GUF and GU series are the result of the synergy in manufacturing achieved by Gummi (producer of the flexible element) and Meccanica Couplings (producer of the steel hubs)

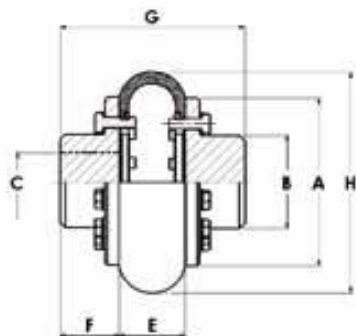

GU (2 mozzi normali)
GU (2 normal hubs)



GU (2 mozzi integrali)
GU (2 integral hubs)

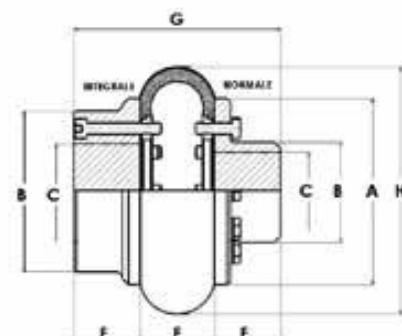

GU (1 mozzo integrale, 1 mozzo normale)
GU (1 integral hub and 1 normal hub)

Grandezza Size	Coppia Nom. Rated torque (Nm)	Angolo Torsione (°) Torsion angle (°)	A (mm)	B		C (Foro / Bore)		E (mm)	F (mm)	G (mm)	H (mm)	Viti N. Screws (No.)	Max RPM		Peso Weight (kg)
				Mozzo Normale Normal Hub (mm)	Mozzo Integrale Integral Hub (mm)	Mozzo Normale Normal Hub Max (mm)	Mozzo Integrale Integral Hub Max mm						Senza Centraggio Without centering	Con Centraggio With centering	
A-20	45	2°	74	36	66	24	30	30	25	80	95	12	5000		1,05
A-25	61	5°	74	36	66	24	30	30	25	80	95	12	5000		1,09
A-30	90	2°	96	49	86	32	44	40	35	110	127	16	4000	5000	2,40
A-35	127	4°	96	49	86	32	44	40	35	110	127	16	4000	5000	2,65
A-45	340	3°	127	70	110	48	60	50	45	140	167	20	3000	3750	5,00
A-50	505	6°	127	70	110	48	60	50	45	140	167	20	3000	3750	5,32
A-60	940	5°	169	100	150	65	90	65	60	185	224	24	2500	3500	12,50
A-70	1287	9°	169	100	150	65	90	65	60	185	224	24	2500	3500	13,30
A-80	1700	5°	218	116	180	85	100	90	80	250	302	20	2250	3000	24,90
A-90	2410	6°	218	116	180	85	100	90	80	250	302	20	2250	3000	26,00
A-95	2550	4°	235	138	198	100	125	90	80	250	330	24	1600	2750	34,90
A-105	3700	8°	235	138	198	100	125	90	80	250	330	24	1600	2750	44,00
A-120/120	6800	5°	297	195		120		120	130	380	403	20	1200	1700	86,00
A-140/140	9350	9°	297	195		140		120	130	380	403	20	1200	1700	94,00
A-155/155	10725	6°	350	220		155		140	150	440	470	14	900	1500	126,00
A-165/165	13420	10°	350	220		165		140	150	440	470	14	900	1500	135,00
A-170/70	14630	7°	436	150		70		185	80	345	550	24	900	1400	170,20
A-170/130				236		130			130	445					211,80
A-170-170				276		170			180	545					242,80
A-200/90	25190	11°	436	186		90		185	100	385	550	24	900	1400	192,60
A-200/140				200		140			130	445					202,40
A-200/200				276		200			180	545					276,80

Per potenze da 26000 Nm a 168750 Nm contattaci.

For powers ranging between 26000Nm and 168750 Nm, please contact our office.



II 2G Ex h T4 Gb X
II 2D Ex h T120°C Db X
TÜV NORD 0206577

I giunti elastici Gummi si possono fornire a richiesta con certificazione ATEX secondo
DIRETTIVA 2014/34/UE - Atmosfere esplosive