

### Filtro in linea autopulente.

- Portata: 260 l/min  
68.7 US GPM
- Ingresso T5M
- Uscita T5F
- Scarico: portagomma Ø 15mm

### Self-cleaning line filter

- Flow rate 260l/min  
68.7 USGPM
- Inlet T5M
- Outlet T5F
- Discharge: hose-tail Ø 15mm



### Filtro en línea autolimpiante

- Caudal: 260 l/min  
68.7 USGPM
- Entrada T5M
- Salida T5F
- Desagüe: portamanguera Ø 15 mm

/min		Mesh	Codice Code Código
260	57.2	50	79.5011.97.3T5
		80	79.5012.97.3T5
		100	79.5013.97.3T5



FLOW RATE  
**260 68.7**  
l/min US GPM

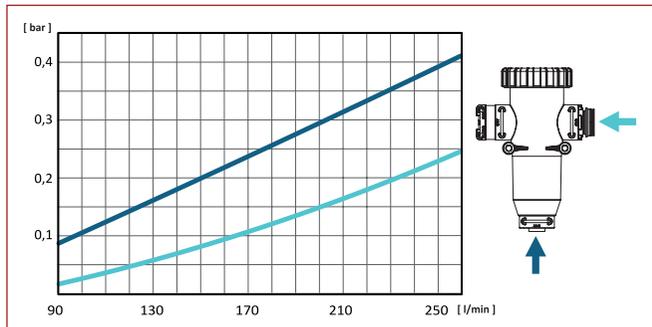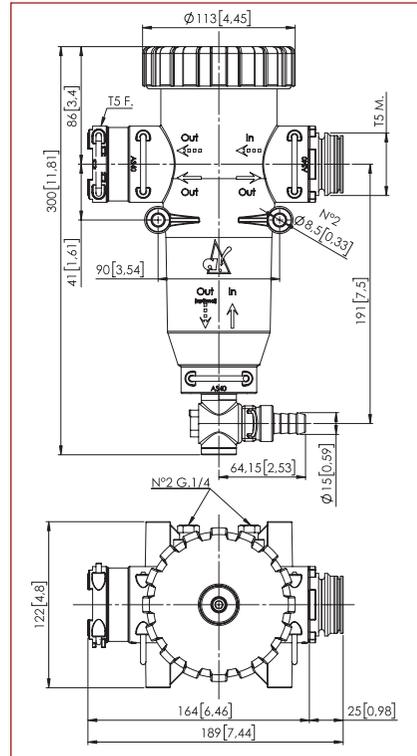

### Filtro in linea autopulente.

- Portata: 500 l/min  
110 US GPM
- Ingresso T5M
- Uscita T5F
- Scarico: portagomma Ø 15mm

### Self-cleaning line filter

- Flow rate 500l/min  
110 USGPM
- Inlet T5M
- Outlet T5F
- Discharge: hose-tail Ø 15mm

### Filtro en línea autolimpiante.

- Caudal: 500 l/min  
110 USGPM
- Entrada T5M
- Salida T5F
- Desagüe: portamanguera Ø 15 mm

/min		Mesh	Codice Code Código
500	110	50	79.5015.97.3T5
		80	79.5016.97.3T5
		100	79.5017.97.3T5



**HI-FLOW**  
500 l/min  
110 US GPM

