


13 PT - PIPE PROTECTION CAP

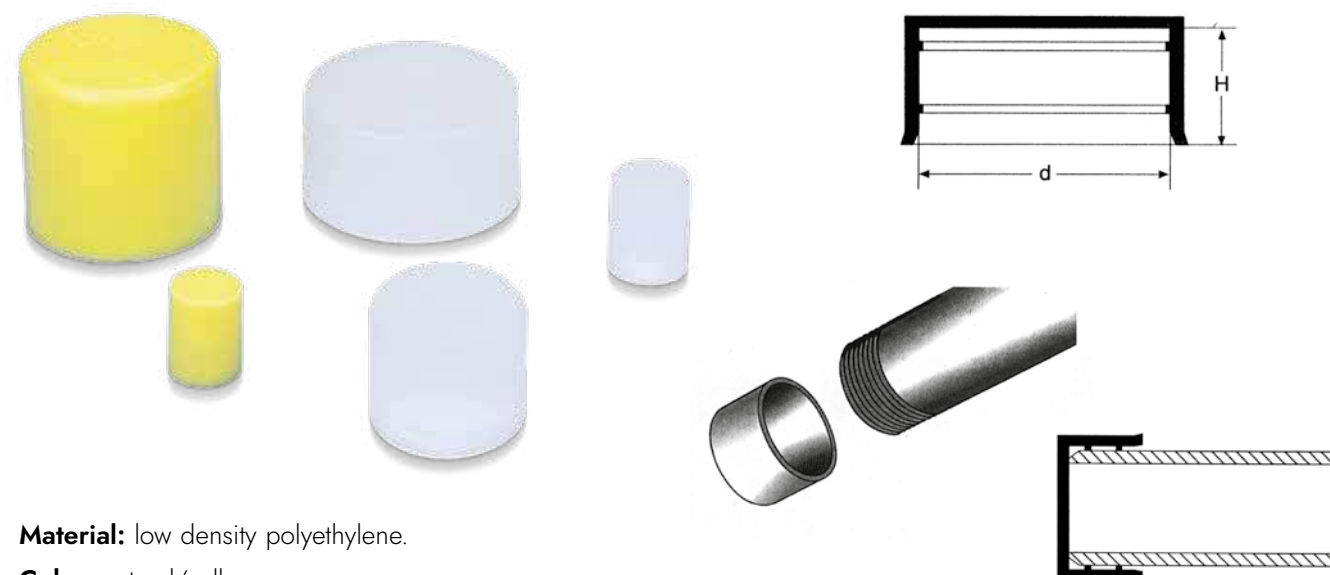

Material: low density polyethylene.


Color: natural/yellow.

Cod.	Ø d	Ø F	H	Pack.	Cod.	Ø d	Ø F	H	Pack.
13PT/04	4		22	1.000	13PT/35	35		25	1.000
13PT/05	5		18	1.000	13PT/36,5	36,5		20	1.000
13PT/06	6		18	1.000	13PT/38	38		20	1.000
13PT/06,35	6,35		18	1.000	13PT/40	40		25	1.000
13PT/07	7		18	1.000	13PT/41,3	41,3	G. 1 1/4"	20	1.000
13PT/08	8		19	1.000	13PT/42,4	42,4	1 1/4"	25	1.000
13PT/09,6	9,6	G. 1/8"	18	1.000	13PT/44,5	44,5		25	1.000
13PT/10	10	1/8"	18	1.000	13PT/45,4	45,4		20	1.000
13PT/11	11		15	1.000	13PT/47,5	47,5	G. 1 1/2"	25	1.000
13PT/11,5	11,5		19,5	1.000	13PT/48,3	48,3	1 1/2"	25	1.000
13PT/12	12		18	1.000	13PT/50	50		28	1.000
13PT/12,7	12,7		18	1.000	13PT/51	51		27,5	1.000
13PT/13	13	G. 1/4"	18	1.000	13PT/52	52		28	800
13PT/13,7	13,7	1/4"	18	1.000	13PT/54	54	1 3/4"	28	1.000
13PT/14	14		20	1.000	13PT/55	55		29	750
13PT/15	15		19	1.000	13PT/57	57		27	1.000
13PT/15,5	15,5		19,5	1.000	13PT/59	59	G 2"	27	1.000
13PT/16	16		20	1.000	13PT/60,3	60,3	2"	27	1.000
13PT/16,5	16,5	G. 3/8"	20	1.000	13PT/65	65		35	500
13PT/17	17	3/8"	20	1.000	13PT/67	67		35	500
13PT/18	18		20	1.000	13PT/70	70		35,5	500
13PT/18,5	18,5		20	1.000	13PT/73	73		30	600
13PT/19	19		20	1.000	13PT/75	75	2 1/2"	28	600
13PT/20	20		20	1.000	13PT/76	76	G. 2 1/2"	30	600
13PT/21,3	21,3	1/2" - G. 1/2"	16	1.000	13PT/77	77	2. 1/2"	35	700
13PT/22	22		20	1.000	13PT/78	78		29,5	500
13PT/23,2	23,2		19	1.000	13PT/80	80		29,5	500
13PT/24	24		20	1.000	13PT/82	82		30	500
13PT/25,4	25,4		20	1.000	13PT/83	83		30	500
13PT/26	26	G. 3/4"	20	1.000	13PT/85	85		30	350
13PT/26,9	26,9	3/4"	20	1.000	13PT/88,9	88,9		35	500
13PT/28,5	28,5		23,5	1.000	13PT/90	90		35	500
13PT/30	30		25	1.000	13PT/92,4	92,4	G. 3" - 3"	25	350
13PT/31,8	31,8		20	1.000	13PT/95	95		37,5	400
13PT/33,7	33,7	1" - G. 1"	20	1.000	13PT/98	98		37,5	350
					13PT/100	100		31	250

01 S/T - PROTECTION PLUG FOR FEMALE THREAD



Cod.	d	D	H	Metric threads	B.S.P.	Cod.	d	D	H	Metric threads	B.S.P.
01ST/02	2	6,5	3			01ST/25,5	25,5	29	10,5	M27x2	
01ST/02,5	2,5	6,5	3,5			01ST/26	26	30,5	10,5		M27x1,5
01ST/03	3	6,5	4,5			01ST/26,5	26,5	30	10,5		
01ST/03,5	3,5	7	4,5	M4		01ST/27	27	31	9,5	M30	M28x1,5
01ST/04	4	7,5	5			01ST/27,5	27,5	31	10,5		
01ST/04,5	4,5	8	5	M5		01ST/28	28	32,5	10,5		
01ST/05	5	9	6	M6		01ST/28,5	28,5	32	10		M30x2 G 7/8"
01ST/05,5	5,5	9	6			01ST/29	29	32	9,5		M30x1,5
01ST/06	6	9,5	6	M7		01ST/29,5	29,5	33	10,5		
01ST/06,5	6,5	10	7			01ST/30	30	33	9,5	M33	
01ST/07	7	10	6	M8		01ST/30,5	30,5	34	10,5		G 1"
01ST/07,5	7,5	10,5	6,5		M8x1	01ST/31	31	35,5	10,5		M32x1,5 G 1"
01ST/08	8	11	7			01ST/31,5	31,5	35	10,5		M33x2
01ST/08,5	8,5	11,5	7,5	M10		01ST/32	32	37	10,5		
01ST/09	9	11,5	7,5		M10x1 G 1/8"	01ST/32,5	32,5	37	10,5	M36	
01ST/9,5	9,5	12,5	7,5			01ST/33	33	38	10,5		
01ST/10	10	13	8,5			01ST/33,5	33,5	37,5	10,5		M36x3
01ST/10,5	10,5	13,5	8	M12	M12x1,5	01ST/34	34	38,5	10,5		
01ST/11	11	14	8,5		M12x1,25	01ST/34,5	34,5	38	10,5		
01ST/11,5	11,5	14,5	9		M12x1	01ST/35	35	40	10,5		M36x2 M36x1,5
01ST/12	12	15	8,5			G 1/4"	01ST/35,5	35,5	39	10,5	M39
01ST/12,5	12,5	15,5	9	M14		01ST/36	36	41	11		
01ST/13	13	16	9		M14x1,5	01ST/36,5	36,5	40	10,5		M39x3
01ST/13,5	13,5	16,5	9,5			01ST/37	37	42	10,5		
01ST/14	14	17	9,5			01ST/37,5	37,5	41,5	10,5		M39x2
01ST/14,5	14,5	17,5	9,5	M16		01ST/38	38	43	10,5	M42	M39x1,5
01ST/15	15	18	9,5		M16x1,5	01ST/38,5	38,5	42	10,5		
01ST/15,5	15,5	18,5	9,5			G 3/8"	01ST/39	39	44	10,5	
01ST/16	16	19,5	10	M18		01ST/39,5	39,5	43	11		M42x3 G 11/4"
01ST/16,5	16,5	19,5	10,5		18x2	01ST/40	40	44,5	10,5		
01ST/17	17	20,5	10,5		M18x1,5	01ST/40,5	40,5	45	11		M42x2
01ST/17,5	17,5	20,5	10,5			01ST/41	41	45,5	10,5	M45	M42x1,5
01ST/18	18	21,5	10,5	M20		01ST/42	42	46,5	10,5		
01ST/18,5	18,5	23	10		20x2	01ST/43	43	47,5	10,5		
01ST/19	19	22	10,5		M20x1,5	G 1/2"	01ST/44	44	49	10,5	M48 M45x2 M45x1,5
01ST/19,5	19,5	23	10,5			01ST/45	45	50,5	10,5		
01ST/20	20	23,5	11	M22		01ST/46	46	50,5	10,5		G 1.1/2"
01ST/20,5	20,5	24,5	10,5		22x2	01ST/47	47	51,5	10,5	M52	M48x2 M48x1,5
01ST/21	21	24,5	11		M22x1,5	G 5/8"	01ST/48	48	52,5	10,5	
01ST/21,5	21,5	25,5	11	M24		01ST/48,5	48,5	53	10,5		
01ST/22	22	25,5	11			01ST/49	49	54,5	11		M52x3
01ST/22,5	22,5	25,5	10,5		24x2	01ST/50	50	54	10		
01ST/23	23	27	10,5		M24x1,5	01ST/51	51	56	11	M56	M52x2 M52x1,5
01ST/23,5	23,5	27	10,5			01ST/52	52	57,5	11		
01ST/24	24	28	11			01ST/53	53	59	11		
01ST/24,5	24,5	28	10,5	M27		G 3/4"	01ST/54	54	61	11	M55x1,5
01ST/25	25	28	12			G 3/4"	01ST/55	55	61	11	M56x1,5
							01ST/56	56	63	12	60x4





Material: low density polyethylene.

Color: natural.


Standard packing: N.1000 pcs codes 01ST/02 - 01ST/40,5
N. 500 pcs codes 01ST/41 - 01ST/67

For bigger dimensions, ask for the packing.

Cod.	d	D	H	Rif. Ø	Cod.	d	D	H	Rif. Ø
01ST/57	56,5	61	10		01ST/90	89,5	93,5	9,5	
01ST/57,5	57,5	63	13,5	G. 2"	01ST/91	91	94,5	9,5	
01ST/58	58	65	11	M60x2	01ST/92	92	95,5	9,5	
01ST/59	59	65	11	M60x1,5	01ST/93	93	101	13,5	
01ST/60	60	64	11		01ST/94	94	98	9,5	
01ST/61	61	67,5	11		01ST/95	95	98	9,5	
01ST/61,5	61,5	67,5	13		01ST/96	96	104	13,5	
01ST/62	62	68	11		01ST/97	97	101	9,5	
01ST/63	62,5	66,5	9,5		01ST/98	98	102	9,5	
01ST/64	63,5	67,5	9,5		01ST/99	99	103	9,5	G. 4"
01ST/65	65	69	10		01ST/100	100	104	10,5	
01ST/66	65,5	71	10,5		01ST/101	101	105	10,5	
01ST/67	67	73	10		01ST/102	102	104	10	
01ST/68	68	75	11		01ST/103	103	113	13,5	
01ST/69	68,5	75	10,5		01ST/104	104	107	10,5	
01ST/70	69,5	74	11		01ST/105	105	108	10,5	
01ST/71	71	77	11		01ST/106	106	109	10,5	
01ST/72	72	79	12		01ST/107	107	115	13,5	
01ST/73	72,5	76,5	9,5		01ST/108	107,5	112	10,5	
01ST/74	74	77,5	10,5	G. 2 1/2"	01ST/110	110	114	12	
01ST/75	75	79			01ST/111	111	116,5	13	
01ST/76	76	80	9,5		01ST/112	112	115	10	
01ST/77	77	81	10,5		01ST/115	115	124	15	
01ST/78	78	82	9,5		01ST/120	120	130	15,5	
01ST/79	79	86	10,5		01ST/121	121	123	12	
01ST/80	79,5	84	13,5		01ST/125	125	136	16	
01ST/81	80,5	85	9,5		01ST/130	129	134,5	13	
01ST/82	82	85,5	9,5		01ST/132	132	141	13,5	
01ST/83	82,5	86,5	9,5		01ST/140	140	151	15,5	
01ST/84	83,5	90	9,5		01ST/150	150	160	16	
01ST/85	84,5	88,5	10		01ST/160	160	170	16	
01ST/85,5	85,5	92	9,5	G. 3"	01ST/167	167	178	17,5	
01ST/86	86	90	11		01ST/170	170	175	13,5	
01ST/86,5	86	90,5	9,5		01ST/180	180	191	16	
01ST/87	86,5	90,5	9,5		01ST/184	184	194	16	
01ST/88	87	91,5	9,5		01ST/186	186	194	16	
01ST/89	88	92,5	9,5		01ST/190	190	195	13,5	
					01ST/200	200	211	15	

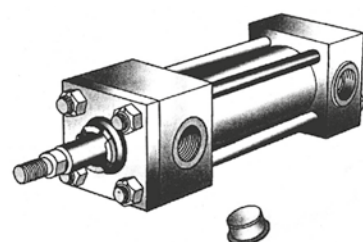

PF - PROTECTION PLUG

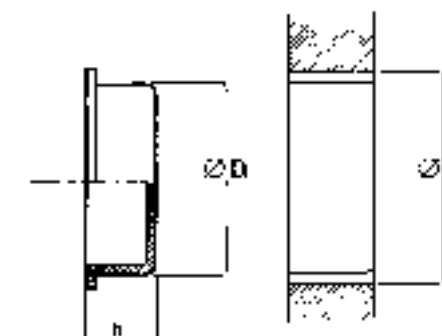


Protection plug for female threads from dirt and damage under storage or shipping.

Material: low density polyethylene.

Color: red.

Cod.	Ø F	D	h	Pack.
PF/18R	G 1/8"	9	8,5	2000
PF/14R	G 1/4"	12	9	2000
PF/38R	G 3/8"	15,5	10,5	2000
PF/12R	G 1/2"	19	11,5	1000
PF/34R	G 3/4"	25	12,7	1000
PF/1R	G 1"	30,5	11	500
PF/114R	G 1 1/4"	39,5	11,5	500
PF/112R	G 1 1/2"	46	11,5	500
PF/14.15R	M14x1,5	12,5	10	2000
PF/16.15R	M16x1,5	14,2	10	2000
PF/18.15R	M18x1,5	16,5	10	2000
PF/20.15R	M20x1,5	18,5	10	1000
PF/22.15R	M22x1,5	20,2	10	1000

13 PGR - GREASE NIPPLE CAP

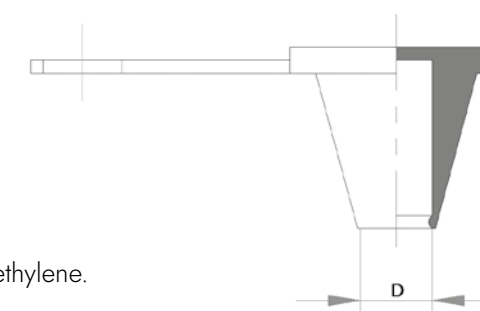


Material: low density polyethylene.

Colore: red.

D: 6 mm.



EP 510 - PIPE PROTECTION CAP

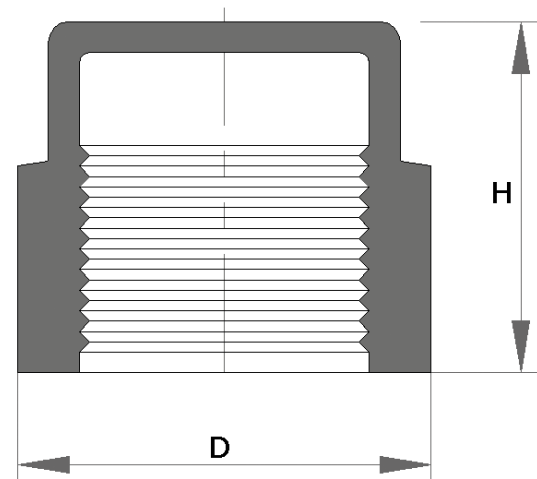

Cod.	Ø F	D	H	Pack.
EP510/ M8x1	M8x1	12	12	1.000
EP510/M10x1	M10x1	14,5	14	1.000
EP510/M 12x1	M12x1	16,5	14	1.000
EP510/ M 12x1,5	M12x1,5	16,5	14	1.000
EP510/ M 14x1,5	M14x1,5	18,5	14	1.000
EP510/ M 16x1,5	M16x1,5	20,5	14	1.000
EP510/ M 18x1,5	M 18x1,5	22	15	1.000
EP510/ M 20x1,5	M 20x1,5	24,5	16	1.000
EP510/ M 22x1,5	M 22x1,5	26,5	16	1.000
EP510/ M 24x1,5	M 24x1,5	28,5	16	1.000
EP510/ M 26x1,5	M 26x1,5	31	15	1.000
EP510/ M 27x2	M 27x2	32	15	1.000
EP510/ M 30x1,5	M 30 x1,5	35	16	1.000
EP510/ M 30x2	M 30 x 2	35	16	1.000
EP510/ M 36x1,5	M 36x1,5	42	18,5	500
EP510/ M 36x2	M 36 x 2	42	18,5	500
EP510/ M 42x2	M 42 x 2	50,5	18	250
EP510/ M 45x1,5	M 45 x 1,5	51,5	20,5	250
EP510/ M 45x2	M 45 x 2	51,5	20,5	250
EP510/ M 52x2	M 52 x 2	59	20	250
EP510/ 1/8"	G. 1/8"	13	12	1.000
EP510/ 1/4"	G. 1/4"	16	13	1.000
EP510/ 3/8"	G. 3/8"	20,5	14,5	1.000
EP510/ 1/2"	G. 1/2"	24,5	15,5	1.000
EP510/ 5/8"	G. 5/8"	28	15,5	1.000
EP510/ 3/4"	G. 3/4"	30,5	16,5	1.000
EP510/ 1"	G. 1"	40	19,5	500
EP510/ 1 1/4"	G. 1 1/4"	48	17,5	500
EP510/ 1 1/2"	G 1 1/2"	56	18	250
EP510/ 2"	G 2"	68	19	250
EP510/ 2 1/2"	G 2 1/2"	83	31	50


Cap designed to protect male threads, screw mounting.

Material: Polyethylene.

Color: yellow.



EP 434 - PFN/2.0P - THREADED PLUG

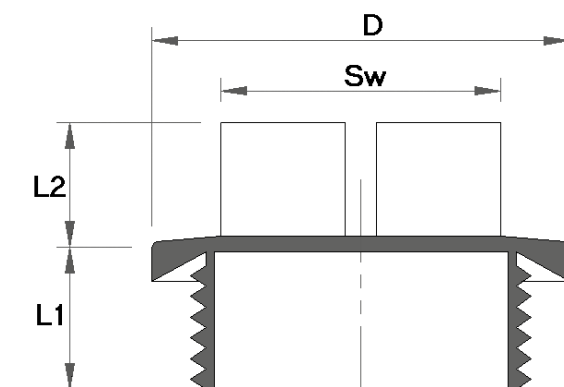

Threaded plug with hex head made to protect female hole, screw mounting.

Material: Polyethylene.


Color: red.

Maximum working temperature: 70°C/158°F.

Cod.	Ø F	D	L1	L2	Sw	Pack.
EP434/M10x1	M10x1	14,2	7	10	10	2.000
EP434/M 12x1,5	M12x1,5	17,2	10	10	13	2.000
EP434/ M 14x1,5	M14x1,5	19,2	10	10	13	2.000
PFN/2.0/16.15P	M16x1,5	22	10	10	17	2.000
PFN/2.0/18.15P	M 18x1,5	24	10	11	17	2.000
PFN/2.0/20.15P	M 20x1,5	26	10	14	19	2.000
PFN/2.0/22.15P	M 22x1,5	27,2	10	14	19	2.000
EP434/ M 24x1,5	M 24x1,5	31,5	12	14	24	1.700
EP434/ M 26x1,5	M 26x1,5	32	10	14	24	1.700
EP434/ M 27x2	M 27x2	32,3	13	14	24	1.500
EP434/ M 33x2	M 33x2	40,4	13	14	27	900
EP434/ M 42x2	M 42 x 2	50	13	15	36	550
EP434/ 1/8"	G. 1/8"	16,8	9	10	13	2.000
PFN/2.0/14 P	G. 1/4"	19,2	9	10	13	2.000
PFN/2.0/38 P	G. 3/8"	22,2	9	11	17	2.000
PFN/2.0/12 P	G. 1/2"	27,2	12	13	19	2.000
EP434/ 3/4"	G. 3/4"	32,3	12	13	24	1.600
EP434/ 1"	G. 1"	40	15	14	27	1.800
EP434/ 1 1/4"	G. 1 1/4"	50,4	15	15	36	1.100
EP434/ 1 1/2"	G 1 1/2"	55,4	15	15	41	900
EP434/ 2"	G 2"	68,4	15	15	55	500



EP 435 - PFN/2.0N - THREADED PLUG

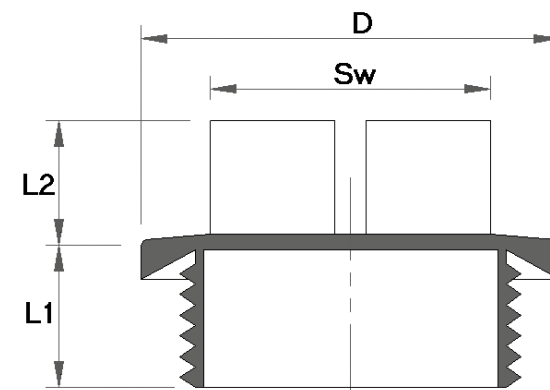

Threaded plug with hex head made to protect female hole, screw mounting.

Material: Polyamide PA6.


Color: yellow.

Maximum working temperature: 90°C/194°F.

Cod.	Ø F	D	L1	L2	Sw	Pack.
EP435/M10x1	M10x1	14,2	7	10	10	2.000
EP435/M 12x1,5	M12x1,5	17,2	10	10	13	2.000
EP435/ M 14x1,5	M14x1,5	19,2	10	10	13	2.000
PFN/2.0/16.15N	M16x1,5	22	10	10	17	2.000
PFN/2.0/18.15N	M 18x1,5	24	10	11	17	2.000
PFN/2.0/20.15N	M 20x1,5	26	10	14	19	2.000
PFN/2.0/22.15N	M 22x1,5	27,2	10	14	19	2.000
EP435/ M 24x1,5	M 24x1,5	31,5	12	14	24	1.700
EP435/ M 26x1,5	M 26x1,5	32	10	14	24	1.700
EP435/ M 27x2	M 27x2	32,3	13	14	24	1.500
EP435/ M 33x2	M 33x2	40,4	13	14	27	900
EP435/ M 42x2	M 42 x 2	50	13	15	36	550
EP435/ 1/8"	G. 1/8"	16,8	9	10	13	2.000
PFN/2.0/14 N	G. 1/4"	19,2	9	10	13	2.000
PFN/2.0/38 N	G. 3/8"	22,2	9	11	17	2.000
PFN/2.0/12 N	G. 1/2"	27,2	12	13	19	2.000
EP435/ 3/4"	G. 3/4"	32,3	12	13	24	1.600
EP435/ 1"	G. 1"	40	15	14	27	1.800
EP435/ 1 1/4"	G. 1 1/4"	50,4	15	15	36	1.100
EP435/ 1 1/2"	G 1 1/2"	55,4	15	15	41	900
EP435/ 2"	G 2"	68,4	15	15	55	500



TFU - THREADED PLUG

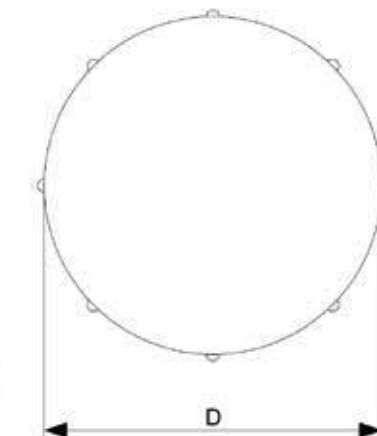

Threaded cap recommended as protection against dust and humidity during transport and storage.

Material: low density polyethylene.


Color: red.

On enquiry available UNF/JIC sizes.



Cod.	Ø F	D	H	h
TFU1/8	1/8" x 28	16,4	10,5	4,2
TFU1/4	1/4" x 19	18,8	12,8	6,5
TFU3/8	3/8" x 19	22,9	12	5,5
TFU1/2	1/2" x 14	28	17,3	10,3
TFU5/8	5/8" x 14	31,3	18,4	13,9
TFU3/4	3/4" x 14	32,3	17	11
TFU7/8	7/8" x 14	38	18,1	13,5
TFU1	1" x 11	39,8	16,9	10,8
TFU1.1/4	1,1/4" x 11	49,9	20,9	15
TFU1.1/2	1,1/2" x 11	55,2	16,9	18,5
TFU2	2" x 11	73,7	17,5	10,7
TFU3	3" x 11	105	16,5	11,3
TFU8	M8 x 1	12,3	14,3	9,5
TFU10	M10 x 1	15,3	14,6	10,4
TFU12X1	M12 x 1	18,5	16,7	10,7
TFU12X1.5	M12 x 1.5	16,7	16,3	8,7
TFU14	M14 x 1.5	18,5	17,2	9,5
TFU14X2	M14 x 2	18,5	17,2	9,5
TFU16	M16 x 1.5	22	17,2	12,5
TFU18	M18 x 1.5	24,4	18,3	13,7
TFU18X2.5	M18 x 2.5	24,4	18,3	13,7
TFU20	M20 x 1.5	26,3	18,2	14
TFU20X2	M20 x 2	26,3	18,2	14
TFU20X2.5	M20 x 2.5	26,3	18,2	14
TFU22	M22 x 1.5	28,2	18,3	13,7
TFU24	M24 x 1.5	31,3	18,5	13,8
TFU25	M25 x 1.5	31,3	18,5	14
TFU26	M26 x 1.5	32,7	18,7	13,8
TFU52	M52 x 1.5	63,7	21,5	15,5

EP 190 - SHAFT PROTECTION CAPS

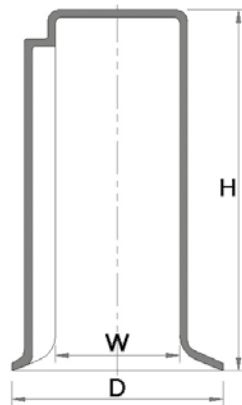

Yellow polyethylene shaft protectors. Cylindrical protection with countersinking that rests on the base of the motor. Equipped with a keyway, it has an aesthetic as well as protective value.

Material: low density polyethylene.

Color: yellow.

Cod.	W (mm)	D (mm)	H (mm)	Key max width
EP190/W9	9	14,5	24	3
EP190/W11	11	17,5	27,5	4
EP190/W14	14	22,5	35	5
EP190/W15	15	25,5	32	5
EP190/W16	16	25,5	47	5
EP190/W19	19	30,5	47	6
EP190/W20	20	32	58,5	6
EP190/W22	22	35,5	58,5	6
EP190/W24	24	38,5	58,5	8
EP190/W25	25	40	70	8
EP190/W28	28	45	70	8
EP190/W30	30	48	93,5	10
EP190/W32	32	51	93,5	10
EP190/W35	35	56	93,5	10
EP190/W38	38	61	93,5	10
EP190/W42	42	67	127,5	12
EP190/W45	45	72	117,5	14
EP190/W48	48	77	127,5	14
EP190/W55	55	88	127,5	16
EP190/W60	60	96	164	18
EP190/W65	65	104	164	20
EP190/W75	75	112	164	20

PROT/VM - PROTECTION FOR MAXIMUM PRESSURE VALUE



Tamper protection for relief valves.

Material: ABS.

Color: black, white, yellow and red.

Available: M6X0,75, M8X1, M10X1, M10X1.5, M12.

EE - EPDM CAP



Cap designed for protection of the threads.

Material: black EPDM.

Max working temperature: 177°C/350 °F.

Available: from ø 0,5 mm to ø 23,8 mm.

Special versions


Material: Silicone model EC for high temperatures applications up to 315°C/599 °F.

IR - PROTECTIONS FOR QUICK COUPLING

Rubber female cap for quick coupling.

Material: thermoplastic elastomer (TPE).

Color: red, blue, green and yellow.

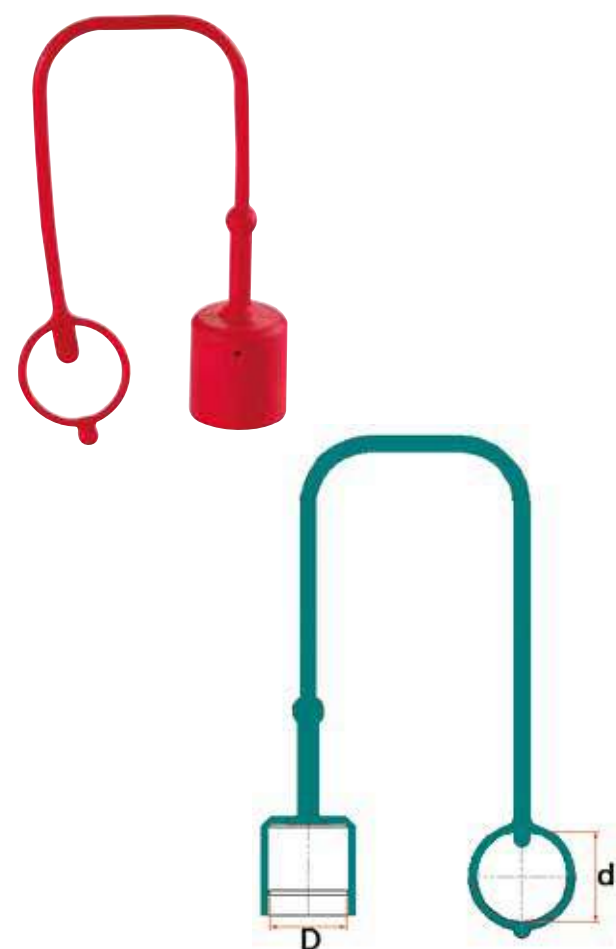

Cod.	D	d	Type
IRF / 14	16,5	20	FASTER
IRF / 38	21	23	FASTER
IRF / 12	23	28	FASTER
IRF / 34	30	36	FASTER
IRF / 1	34	38	FASTER

IRF / 14 A	12,7	20	ISO A
IRF / 38 A	18,3	25	ISO A
IRF / 12 A	24,3	28	ISO A
IRF / 34 A	30,7	35	ISO A
IRF / 1 A	36,5	42	ISO A

IRF / 14 B	15,5	20	ISO B
IRF / 38 B	20	23	ISO B
IRF / 12 B	25,7	28	ISO B
IRF / 34 B	32,7	34	ISO B
IRF / 1 B	40,5	43	ISO B

Rubber male cap for quick coupling.

Material: thermoplastic elastomer (TPE).

Color: red, blue, green and yellow.



Cod.	D	d	Type
IRM / 14	16,5	20	FASTER
IRM / 38	21	23	FASTER
IRM / 12	23	28	FASTER
IRM / 34	30	36	FASTER
IRM / 1	34	38	FASTER

IRM / 14 A	12,7	19,6	ISO A
IRM / 38 A	18,3	25	ISO A
IRM / 12 A	23,6	31	ISO A
IRM / 34 A	29,2	36	ISO A
IRM / 1 A	36,5	48	ISO A

IRM / 14 B	15,5	22,2	ISO B
IRM / 38 B	20	28	ISO B
IRM / 12 B	25,7	35	ISO B
IRM / 34 B	32,7	42	ISO B
IRM / 1 B	40,5	51	ISO B

24 - FIBER GASKET



Material: Fasit 202 (technical sheet available on request).

Color: green.

Applications: gases, oils, lubricants, fuels, air and water.

Available for thread BSP from G.1/4" to G.2", for metric threads from M 14x1,5 to M 26x1,5.

92A - FIBER GASKET



Material: Rollmart (technical sheet available on request).

Color: light blue.

Applications: air, water, low concentrated acids, gases, mineral oils.

Available for thread BSP from G.1/8" to G.2", for metric threads from M 12x1,5 to M 24x1,5.

25 - RUBBER GASKET



Material: NBR 70-80 Shore durometer (depending of the size).

Color: black.

Available for thread BSP from G.1/4" to G.2", for metric threads from M 10x1,5 to M 40x1,5.

90B - ALUMINUM GASKET



Material: Aluminum alloy.

Color: grey.

Available for thread BSP from G.1/8" to G.2", for metric threads from M 10x1,5 to M 42x1,5.