
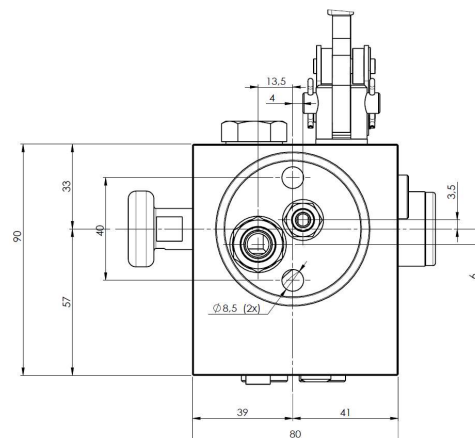


hydraulic schematic


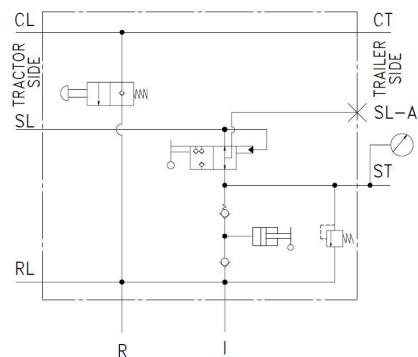


Limit of use


Max pressure (CL port): 150 bar
 Max pressure (SL port): 35 bar
 Hydraulic fluid: Hydraulic oil according to DIN 51124
 Viscosity range: 10 To 380 cSt
 Filtration range: NAS 1638 class 8
 Assembly position: any
 Temperature: -20 / +90° C

Ports		Thread	Max tightening torque
CT	Trailer control line (trailer side)	M22X1,5 DIN 3852-1X	65 Nm
ST	Trailer supplementary line (trailer side)	M22X1,5 DIN 3852-1X	65 Nm
CL	Trailer control line (tractor side)	M22X1,5 DIN 3852-1X	65 Nm
SL	Trailer supplementary line (tractor side)	M22X1,5 DIN 3852-1X	65 Nm
SL-A	supplementary line from automatic brake pressure adjuster (trailer side)	M12X1,5 DIN 3852-1X	25 Nm
RL	Return line (tractor side)	M18X1,5 DIN 3852-1X	35 Nm
I	Inlet joint (Suction side)	Pipe $\varnothing 9$	--
R	Reservoir joint (drain line)	Pipe $\varnothing 14$	--


Trailer side connections

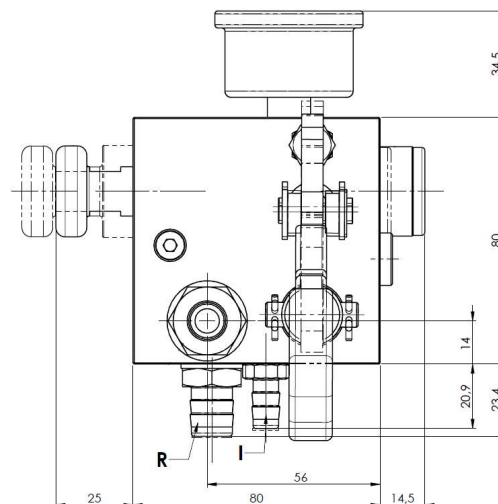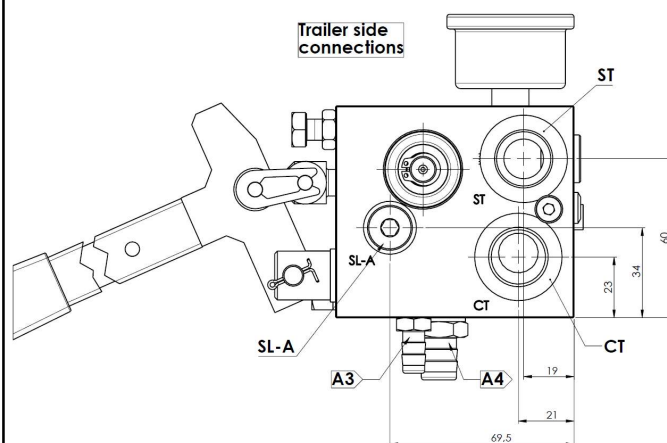


Tractor side connections

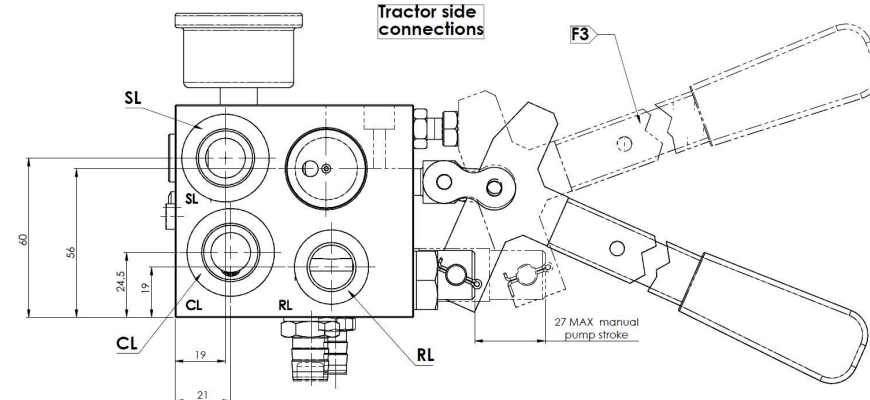

assembly position

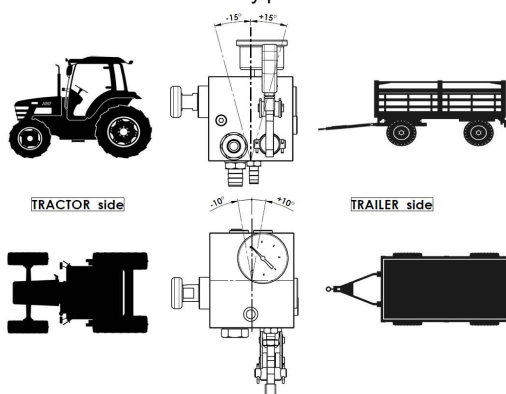

0	PRIMA EMISSIONE		C. Tadini	A. Gaba	14/10/2024
N° MODIFICA	DESCRIZIONE MODIFICA		Disegnato	Approvato	Data
N° Modifica	Codice	N° Disegno	DOCUMENTO RISERVATO A TERMINI DI LEGGE - VIETATE RIPRODUZIONI ANCHE PARZIALI NON AUTORIZZATE		
0	ID95500100	ID95500100			
Formato	Disegnato	Approvato	Data		
A4	C. Tadini	A. Gaba	14/10/2024		
Denominazione					
Pompa remotata					



Via Enrico Mattei 13/A,
 24040 MADONE (Bg) Italia
 Tel: +39 035 4943498
 e-mail: info@sivatsrl.com
 www.sivatsrl.com