
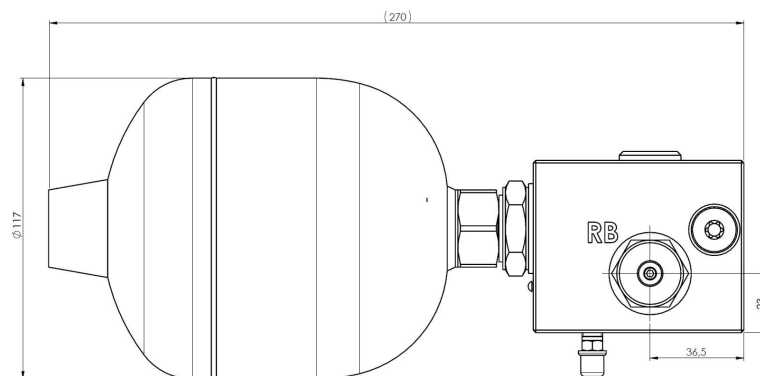





hydraulic schematic

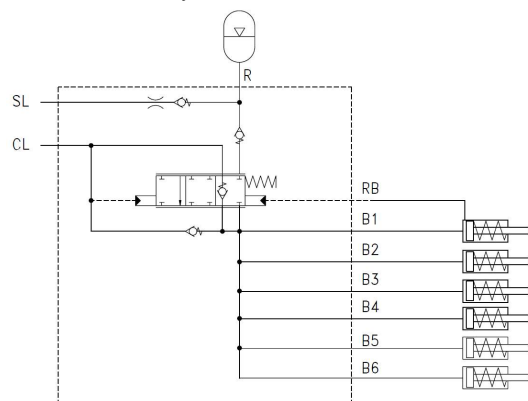


Limit of use

Max pressure (CL port): 150 bar
 Max pressure (SL port): 35 bar
 Hydraulic fluid: Hydraulic oil according to DIN 51124
 Viscosity range: 10 Tto 380 cSt
 Filtration range: NAS 1638 class 8
 Assembly position: any
 Temperature: -30 / +90° C

Ports		Thread	Max tightening torque
CL	Control line from tractor	M22X1,5 DIN 3852-1X	120 Nm
SL	Supplementary line from tractor	G 3 / 8 DIN 3852-2X	85 Nm
R	Accumulator	G 3 / 4 DIN 3852-2X	210 Nm
B1,B2,B3,B4,B5,B6	Brakes	M18X1,5 DIN 3852-1X	85 Nm
RB	Brake reaction	M10X1,5 DIN 3852-1X	30 Nm

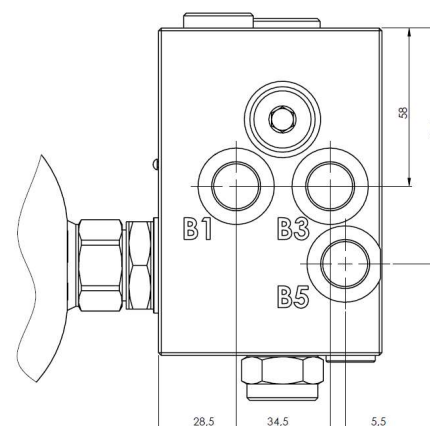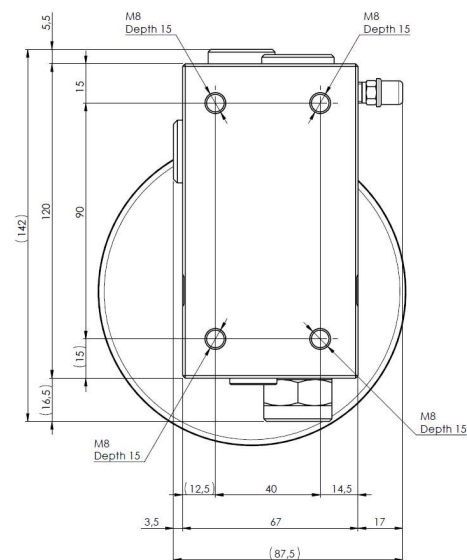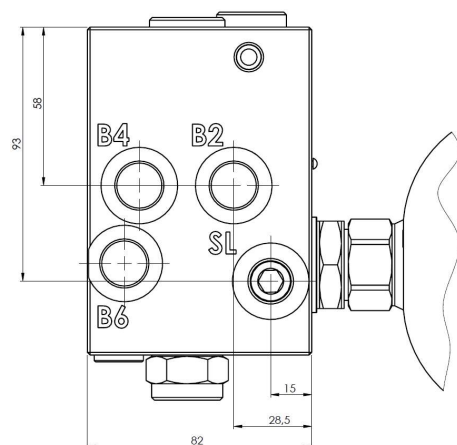

0	PRIMA EMISSIONE		C. Tadini	A. Gaba
N° MODIFICA	DESCRIZIONE MODIFICA		Disegnato	Approvato
N° Modifica	Codice	N° Disegno	Note	
0	ID40500000	ID40500000	DOCUMENTO RISERVATO A TERMINI DI LEGGE - VIETATE RIPRODUZIONI ANCHE PARZIALI NON AUTORIZZATE	
Formato	Disegnato	Approvato	Data	
A4	C. Tadini	A. Gaba	14/10/2024	
Denominazione				
Valvola relè				



Via Enrico Mattei 13/A,
 24040 MADONE (Bg) Italia
 Tel: +39 035 4943498
 e-mail: info@sivatsrl.com
www.sivatsrl.com