




MF MC4

MultiFaster 4 lines, size 04. ISO 16028 individual couplings connectable.

Thanks to the special design of couplings, it's possible to connect to each plate either its counterpart or individual 1/4" quick couplings compliant with ISO 16028.



Applications

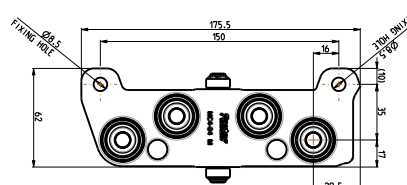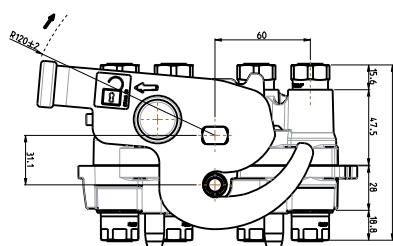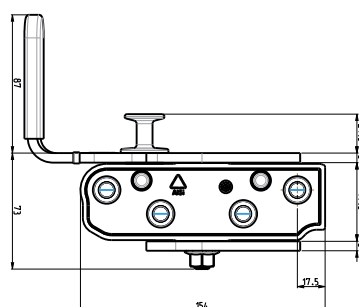

Technical Specifications

dash	Size		Working Pressure (MPa)	Flow Rate (l/min)	Spillage (ml)	Burst pressure (MPa)		
	mm	inch				Male	Female	Male + Female
04	6,3	1/4"	20	25	0,008	80	80	80

Material	Aluminium; Steel
Seals	NBR; PUR
Working temperatures	- 25 °C to + 100 °C
Surface treatment	MATE 500 (CrIII); Paint

Valve Type	Flat
Connection	Lever
Disconnection	Lever
Connection Under Pressure	Allowed Residual



MC4

Size					Thread Type					FIXED
dash	mm	inch	Housing	Number of Couplings	Thread Type	Standard	Thread	Electrical Connector N Type		Part Number
04	6,3	1/4"	4	4	0/ SAE	ISO 11926-1	9/16" - 18 UNF FEMALE ORB			MC4-04-38S FC

Size					Thread Type					MOBILE
dash	mm	inch	Housing	Number of Couplings	Thread Type	Standard	Thread	Electrical Connector N Type		Part Number
04	6,3	1/4"	4	4	0/ SAE	ISO 11926-1	9/16" - 18 UNF FEMALE ORB			2MC4-04-38S MC

Spare Parts & Accessories

Female Half				Male Half					
Plates	Lever	Dust cover	Safety Lock	Plates	Seals male	Screws	Plugs	Guiding pins	Docking
KIT MC4 F L	KIT MC4 04			KIT MC4 M	SK MF 14				