
Polly Aqua Tape



Polly Aqua tape is a continuous maze with droplets ideal for small distances between vegetable corps in the open field.

Therefore, the reduced distance between the drop points and the low rate guarantee excellent performance even on very damanding ground.



TECHNICAL DETAILS

- Impeccable integrated labyrinth
- Dripper spacing in cm: 10cm, 15cm, 20cm, and 30cm
- Wall thickness: 6mil, 8mil
- Dripper flow rates in lph/m: 0.6, 0.9 and 1.2
- Pipe diameters in mm: Ø16
- Reel length: 100m, 500m, 1000m, 3000m
- Recommended working pressure: 0,7 1 bar


Irrigation tape 200 micron, 10cm spacing, 6l flow placed on banks under strawberry mulch film.

Ideally formed water pillar.



Installed Polly Aqua 150 micron, 10cm, 6l flow and mulch film for sweet corn.



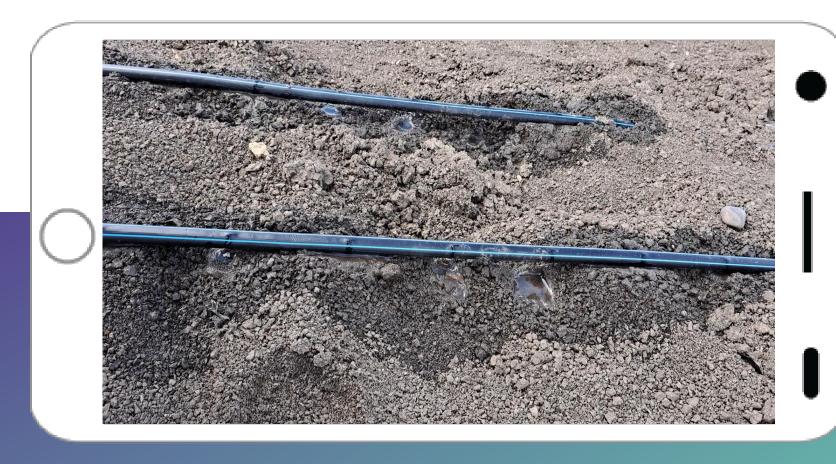



AQUA STAR

Is a drip tape that has built in self-cleaning emitters that prevent particles from accumulating inside the drip maze even at the lowest operating pressures. It is made of polyethylene, which guarantees resistance to stretching and the best performance in terms of mechanical strength.



TECHNICAL DETAILS

• **Dripper type:** integral, flat/nano



• Dripper spacing in cm: 10cm, 20cm, and 30cm

• Wall thickness: 6mil, 8mil

• Dripper flow rates in lph: 11, 21


• Pipe diameters in mm: Ø16, Ø20

• Reel length: 500m, 1000m, 2500m





Installation of Aqua Star tape, 150 microns thick, 10cm distance between drippers and 10l flow rate.
Cabbage field, Belotić.

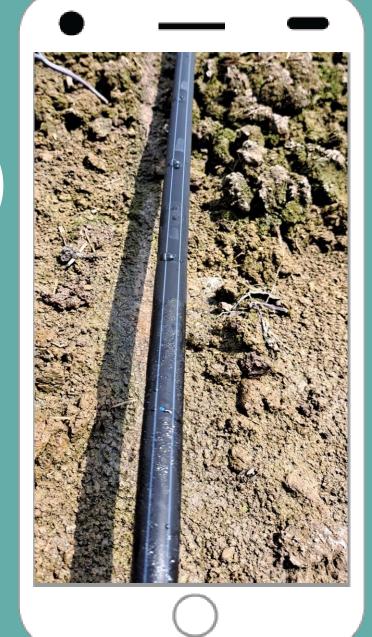


POLLY ROUND PIPE

Polly pipes are pipes with cylindrical drippers for flat terrain and for slopes. The pipes are used for various agricultural crops, they have drippers with double perforation which improves the irrigation itself.

The four emission holes located in the opposite position work according to the principle of even irrigation of plant roots "drop by drop", maintain soil moisture, prevent the introduction of impurities, are easy to lay and efficiently irrigate the plant with a smaller amount of water.

- **Dripper type:** integral, round with double perforation, PC dripper
- Dripper distance in cm: 20cm, 25cm, 30cm, 33cm, 40cm and 50cm
- Wall thickness in mm: 0.9mm, 1mm, and 1.1mm
- Dripper flow rates in lph: Ø16mm 2l and 4l. Ø20 2l and 4l
- Pipe diameters in mm: Ø16 and Ø20
- Reel length: Ø16 400m; 300m; 200m Ø20 300m; 200m



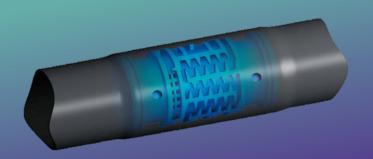

Polly Round Pipe installed in the vineyard at height, and on the ground for vegetables.









Polly Round Pipe in blueberry production

