



**CCPILOT V1200** is a **12.1" display** computer featuring an **i.MX 8QuadXPlus** application processor. It comes with a very **powerful GPU** with much higher graphics performance than earlier generations of ARM processors.

The **high brightness** and **contrast screen** has Wide XGA resolution and uses IPS technology for **wide viewing angles** and color accuracy. It comes with a **multi-touch PCAP touch screen** for intuitive user interaction also with gloves. The screen assembly is optically bonded, reducing reflections and making the display easy to read also in direct sunlight.


Wired interfaces include up to 4 CAN ports, Gigabit Ethernet & USB 2.0. It also features a USB-C connector with USB 3.0 for peripherals. Built-in **Wi-Fi & Bluetooth** are **optional**, enabling software updates over the air,

smartphone integration and other wireless features. The CCpilot V1200 is available with LinX, but includes firmware and OS support, pre-packaged application toolchains for Qt and CODESYS, and application modules for commonly required functionality.

With the open platform approach, customers can base their solution on a robust and secure base while keeping the flexibility to use inhouse or 3rd party development resources, work with alternative toolchains or easily deploy existing applications.

The V1200 product platform has inherent support for a number of optional features. For example, it features a mini-PCIe module slot which can be used for integrating an AI/ML accelerator module or an extra storage card to boost performance and extend capabilities.

## DIMENSIONS

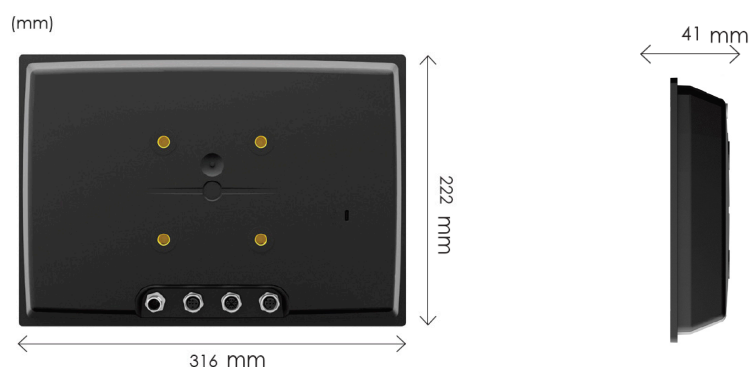

U-CONTROL Srl. - Via Micheli 9, 43056 San Polo di Torrile (PR)

Tel. +39 0521 273823 | Mail: info@u-control.eu | www.u-control.eu | P.IVA 02722200348

\* The company reserves the right to make any kind of design or functional modification at any moment without prior notice

### COMPUTING CORE

OVERVIEW	i.MX 8QuadXPlus, quad core CPU, integrated GPU & M4 Co-processor
CPU	4 x Cortex A35 @ 1.2 GHz
GPU	Vivante GC700olite high performance graphics processing unit
STORAGE	8 GB, enhanced mode eMMC pseudoSLC.
RAM	2 GB 32 bit LPDDR4 @ 1200GHz

### DISPLAY

TYPE	IPS Type with >88° viewing angles in all directions
COVER LENS	Tempered glass with AG coating
OPTICAL BONDING	Display, touch screen and cover lens optically bonded to achieve sunlight readability
SIZE AND RESOLUTION	12.1" WXGA, 1280x800 pixels
COLOR DEPTH	24 bit, 16 million
CONTRAST RATIO*	1000:1
BRIGHTNESS*	Typ. 1275 cd/m <sup>2</sup>
DIMMING	Yes, in steps, 1-100%
AMBIENT LIGHT SENSOR	Yes, enabling automatic dimming

\* Typical values

### INTERFACES

CAN	2 ports, physical layer ISO 11898 2:2016, ISO11783-5:2019 compatible (2ms interrupts with a capacitor). Configurable bit rate. CAN FD compliant. 2 additional ports optional
USB	USB 1 x USB 2.0 high speed, 1 x USB 3.0 super speed
ETHERNET	1 x 1000BASE-TX
WI-FI	Optional. 802.11ac/a/b/g/n, dual-band 2.4/5 GHz
BLUETOOTH	Optional. Bluetooth 5.0
POWER SUPPLY	12/24 VDC nominal, range 9-36 VDC. Power on from 4.5 Volt over DC
KEY SWITCH	1 Key switch input, for start-up/suspend/resume/ shutdown

### ENVIRONMENTAL SPECIFICATIONS

IP CLASS	IP65, IP66, and IP67
EMC CONFORMITY	2014/30/EU, ISO 14982:2009, ISO 13766-1:2018, ISO13766-2:2018
VIBRATIONS	IEC 60068-2-64. Random, 0.02g <sup>2</sup> /Hz 5-2000Hz 3x3h
SHOCK	IEC 60068-2-27. ±25g /6ms±3 x3, 15000 total shocks
TEMPERATURE RANGE (°C)	Operating: -30 to +70, Storage: -40 to +80

### HMI

TOUCH SCREEN	Projective Capacitive with up to 10-point multi-touch. Calibrated to support interaction with gloves or be in-sensitive to water drops
STATUS LED	RGB LED
BUZZER	Yes, Configurable frequency and volume. Max 75dB @ 10cm from front

### MECHANICAL

HOUSING MATERIAL	Nylon, Valox 357x
INSTALLATION	Panel mounted or 4 point VESA 75 mount
CONNECTORS	3 x DIN M12 for Power & CAN, Ethernet and USB 2.0 1 x USB-C for USB 3.0 interface. Optional: 1 x DIN M12 for 2 additional CAN
DIMENSIONS (mm)	316 x 222 x 41
WEIGHT (kg)	< 1580 g

### OPERATING SYSTEM

SYSTEM	Custom Linux system based on Yocto 3.0+
KERNEL	5.4+ (Long Term Support)
BSP	Available to create a custom Linux image
COMPUTING and GRAPHICS APIs	Support for advanced UX and computing tasks: OpenGL ES, Vulkan, OpenCL, OpenVG
BOOTUP TIME	Configurable. Cold boot 4-7 sec

## SOFTWARE FRAMEWORKS & TOOLS

DEVELOPMENT ENVIRONMENT	Virtual machine or Native Linux
PROGRAMMING	Supported languages include C++, C, QML, JavaScript, Python, HTML5, IEC61131-3
GCC COMPILER	GCC C++17 or newer
UI FRAMEWORKS	Supports Qt6 and Qt5. Qt Commercial is optional, enables closing access to the system. Support for Web frameworks
WINDOWING	Weston, Qt Wayland, X Wayland, Direct EGLFS is available if windowing is not required

## APP. PLATFORM

LinX Software Suite, open and modular platform based on Qt, common for all CCpilot products. Examples of modules and components listed below.

GUI DESIGN	UX Designer, a pre-built virtual machine with Qt Creator, compilers, libraries, graphical components and templates
CAN NETWORKING	Fieldbus Access, easy configuration of J1939 and CANopen networks
ISOBUS	Universal Terminal
SMART DEVICE INTEGRATION	Smart Connect, framework for building apps and integrating smart phones and tablets (Service tool, secondary HMI)
REMOTE APPLIC. ACCESS	VNC server and client, web browser and server
SOF PLC	CODESYS 3.5
DIGITAL VIDEO	Ready-made solution for displaying multiple digital camera streams over Ethernet. RTP, MPEG4, MJPEG, H.264 (4Kp30) and H.265. Support for controlling camera settings like resolution and frame rate

## PLATFORM SUPPORT

Below you find specifications of features for which the product platform has inherent hardware support. These are not currently available in the standard product specified above but may be added over time in the generic evolution of the product, or added for a specific, larger customer program.

CAN FD	BSP/SDK can be developed on request
LARGER STORAGE	Expandable up to 32 GB enhanced mode eMMC pseudoSLC. Possible to increase storage even more through Mini-PCIe card (see below)
TOUCH SCREEN SENSITIVITY	Option to have touch controller calibrated for special use cases
SECURITY	RSA/AES, elliptic-curve cryptography, key storage, secure boot-up, signed applications, docker
Qt AUTOMOTIVE	Supports Qt Automotive, featuring e.g. safe rendering and IVI applications
ANDROID	Supports Android
EXPANSION CARDS & MODULES	Mini-PCIe boards and modules can be added for extending functionality and performance. E.g. AI/ML accelerator modules, radio and connectivity modules, storage cards
OS IN CO-PROCESSOR	Supports use of an RTOS in the integrated Cortex - M4F companion microcontroller (co-processor). For implementation of real time critical and safety functionality
KEY SWITCH	Support for a second key switch for pre-ignition