





- 720g specially hardened heat forged hammers to shred vegetation up to 5cm thick.
- Lateral hydraulic lawn mower.
- Autonomous hydraulic pump with oil tank.
- Hydraulic displacement with double-action bottle.
- Heavy cast iron gear box and reinforced crown wheel and free wheel 540 rpm.
- Long life bearing.
- Adjust disk recovery speed.
- Electronically balanced rotor with double spiral drive shaft .
- Protective front bulk-heads.
- The vessel is equipped internally with a toothed blade to achieve better cutting.
- Height adjustable lateral skids.
- Adjustable roller unit with mud scraper.
- 3 Belt transmission with external tensioner.
- Universal 3 points linkage cat. I-II (o 19.0-22.0mm / 25.0-28.0mm).
- CE Safety Guard.

M	€	₩G.	hp	, J ^c ,	1	m	mm	no.	J no.	5/ _©	no.
			пр	111111	800		111111	110.	110.	111111	110.
ATK125		300	25-60	1370+500/1650/830	450	800	1250+600	20	40	108*8	3
ATK135		321	25 60	1470+500/1650/830	800	550	1350+600	20	40	108*8	3
AIRTSS		321	23-00	14/0+300/1030/630	450	900	1330+000	20	40	100 0	3
ATK145		342	30-60	1570+500/1650/830	800	650	1450+600	22	44	108*8	3
AIRETO		342	30 00	13701300/1030/030	450	1100	14301000	22	77	100 0	3
ATK155		363	35-60	1670+500/1650/830	800	750	1550+600	24	48	108*8	3
AIREGO		303	33 00	10701300/1030/030	450	1150	13301000	21	10	100 0	3
ATK165		384	40-70	1770+500/1650/830	800	800	1650+600	26	52	108*8	3
AIREGO		301	10 70	17701300710307030	450	1250	10301000	20	32	100 0	3
ATK175		405	40-70	1870+500/1650/830	800	900	1750+600	28	56	108*8	3
71111270		100	10 70	10,01200,1020,030	450	1350	1,201000	20	30	100 0	
75-70		PTO s	haft wi	th plastic cover 700m:	m (inc	cluded)					

MULCHER **ARES-P** with side shift and inter-row disc





EN USAGE AND CHARACTERISTICS

- New reinforced heavy type mower with 5+4mm hood, 8mm side plates and 160x10mm rotor.
- 1200g specially hardened heat forged hammers to shred vegetation up to 8cm thick.
- Innovative construction of the linkage system offers more side shift.
- Fast acting Inter-row cutter disk equipped with a spring damper which cushions violent shocks
- Cast iron gear box "COMER" with free wheel 540 rpm.
- SKF long life external bearings.
- Double main hood.
- Rear collecting rakes.
- 1 rear bonnet opened mechanically or hydraulically (optional).
- Electronically balanced with double spiral drive shaft.
- Protective front bulk-heads.
- The vessel is equipped internally with a toothed blade for better shredding.
- Height adjustable lateral skids.
- Adjustable roller unit with mud scraper.
- 5 belt transmission with external tensioner.
- Support bracket.
- Universal 3 points linkage cat. I-II (ø 25.0- 22.0mm/28.0mm).
- CE Safety Guard.

M	€	C KIS	hp	mm mm	mm	mm	no.	no.	50 mm	no.
STRONG 140P		500	40-100	1600/1162/968	598 828 250 1176	1400	12	24	160*10	5
STRONG 160P		540	45-100	1800/1162/968	598 1028 250 1376	1600	14	28	160*10	5
STRONG 180P		580	50-100	2000/1162/968	598 1228 250 1576	1800	16	32	160*10	5
STRONG 200P		610	55-100	2200/1162/968	598 1428 250 1776	2000	20	40	160*10	5
STRONG 220P		650	65-100	2400/1162/968	598 1628 250 1976	2200	20	40	160*10	5

ARES-H
DKARES
WSARES140
WSARES240
T5-100

Hydraulic displacement system Hydraulic opened rear bonnet Wheel set YBK140-220 Wheel set YBK240

PTO shaft with plastic cover 1000mm(included)

$MULCHER \ \textbf{CERBERUS} \ \ \text{with max lateral displacement and inter-row disk}$





EN USAGE AND CHARACTERISTICS

- Unbreakable hammers 1200g to shred vegetation up to 9cm thick.
- Fast acting Inter-row cutter disk equipped with a spring damper which cushions violent shocks
- Autonomic hydraulic valve with oil tank.
- Sturdy double-sided frame with max lateral displacement
- Cast iron gear box "GRAECUS" with free wheel 540 rpm.
- NSK long life external bearings.
- Electronically balanced with double spiral drive shaft.
- Protective front bulk-heads.
- Better shredding of grasses and branches is achieved by the counter blades under the hood.
- Height adjustable lateral skids.
- Adjustable roller unit with mud scraper.
- Belt transmission with external tensioner.
- Universal 3 points linkage cat. II(ø 25.0-28.0mm).
- EC Conformity.

M	€	(KIG)	hp	mm mm	mi	n	mm	no.	no.	‰ mm	no.
Hyper200P		850	65-120	2150/1200/1100	1000 -120	1000 2120	2000+600	18	36	170*10	5
Hyper220P		890	70-120	2350/1200/1100	1000 -120	1200 2320	2200+600	20	40	170*10	5
Hyper240P		930	75-120	2550/1200/1100	1000 -120	1400 2520	2400+600	22	44	170*10	5

T8-90


PTO shaft with plastic cover and safety pin 900mm (included)

SUCKER REMOVER **ERIS**





- The hydraulic sucker remover head ERIS is designed to remove the new shoots or suckers that grow along the trunk vines and trees together with the grass around
- Hydraulic system complete with tank and PTO pump.
- Hydraulic motor OT made in Italy.
- Manual head lifting.
- Double wire, nylon square type 4mm.
- Hydraulic side shift, 2 hydraulic tubes required.
- Inter-row weeder adjustable with spring return tension.
- Wheels designed to absorb shocks with adjustable height and width.
- Easy-to-adjust spring return lateral hydraulic brush Cleaning width 600mm and height 500mm.
- 27liter capacity tank with oil cooling system 12V.
- SKF long life external bearings.
- Reinforced at all stress points.
- The main joints are made of high hardening steel.
- Support bracket.
- Universal 3 points linkage cat. I-II (o 19.0-22.0mm / 25.0-28.0mm).
- EC Conformity.

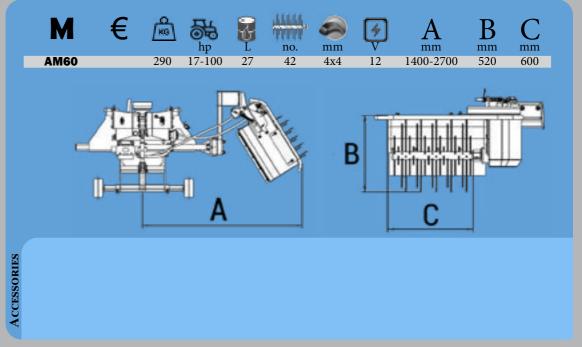



TOOL CARRIER CHIMERA SH90/DH90



EN USAGE AND CHARACTERISTICS

• **SH90 R/L**: Sturdy steel frame is equipped with a hydraulic opening arm(alternating on both sides R & L) on which the implement-holding structure is applied. **DH90**: Sturdy steel frame is equipped with a hydraulic double opening arm. Fast tool connection with quick couplers. Adjustable height wheels. Support bracket. Universal 3 points linkage cat. II(Ø25.0-28.0mm).

M	€	₩G.	mm mm	L/min	P B P
SH90 R/L		140	1162/503/1050	-	581/900
DH90		160	1162/503/1050	-	900/581 581/900


CCESSORII

TOOL CARRIER CHIMERA SH120/DH120









EN USAGE AND CHARACTERISTICS

• **SH120** R/L: Sturdy steel frame is equipped with a hydraulic opening arm(alternating on both sides R & L) on which the implement-holding structure is applied. **DH120**: Sturdy steel frame is equipped with a hydraulic double opening arm. Fast tool connection with quick couplers. Adjustable height wheels. Support bracket. Universal 3 points linkage cat. II(ø25.0-28.0mm).

	المسر	000 1 1 000	
		THE	
	Н	1	ÀΠ
	1.0.0		H
0		640 01- 11	
	3 3 00	T.	- 1
	1011	-20	
1000	- 100	- 797	107

M	€	KG	mm	L/min	P (1) P
SH120 R/L		155	1464/503/1120	-	732/1200
DH120		175	1464/503/1120	-	1200/732 732/1200

ACCESSORIE





TOOL CARRIER CHIMERA HYD120



EN USAGE AND CHARACTERISTICS


• **HYD120**: Sturdy steel frame is equipped with a hydraulic double opening arm. Autonomous hydraulic pump. Fast tool connection with quick couplers. Adjustable height wheels. Support bracket. Universal 3 points linkage cat. II(ø25.0-28.0mm)

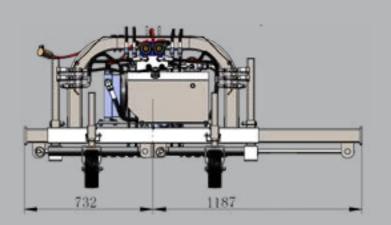



INTER-ROW ACCESSORIES CHIMERA



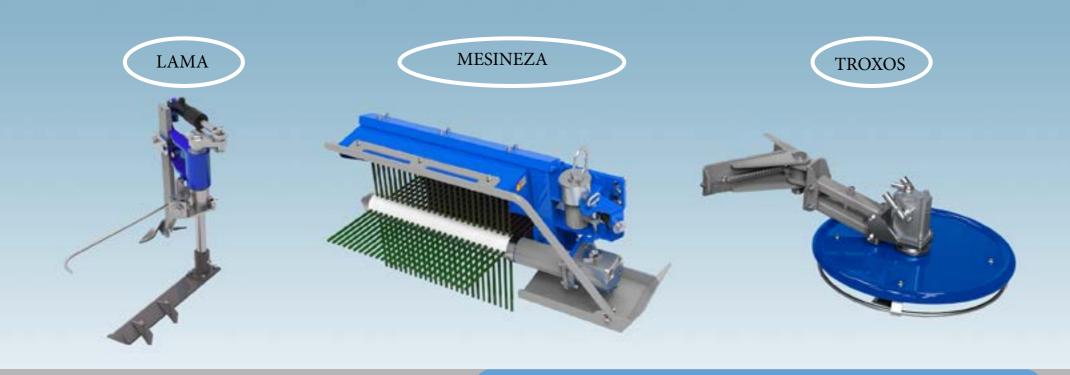

- **LAMA36 R/L**: Inter row weeder blade 36cm with side deflector and solenoid valve for instant reset. Maximum working speed 10km/h. Available in left and right.
- **MESINEZAGO R/L**: Spring return with tension adjustment inter-row weeder. High durability nylon wire 8mm. Maximum working speed 5km/h. Available in left and right.
- **TROXOS R/L**: Safety spring return with tension adjustment inter-row disc. Maximum working speed 5km/h. Available in left and right.

M	€	₩G.	mm mm	L/min	mm	9	PiiP
LAMA36 R/L		30	444/-/-	10	360	1200 1650	1200 1200 1650 1650
MESINEZA60 R/L		60	1000/345/560	30-50	600	1750 2200	1750 1750 2200 2200
TROXOS60 R/L		45	850/800/320	30	600	1300 1750	1300 1300 1750 1750

- Delivered with hydraulic tubes and quick couplers.
- All accessories have EC Conformity.



ROTARY TILLER **AF** inter-row





- Automatic, hydraulically displaced rotary tiller with spring damper.
- Independent hydraulic kit (pump and oil tank)
- Hydraulic tilting of the working head is adjusted with a lever. Safety control standard remote lever, activate to avoid obstacles.
- Toothed wheels at the coupling point help reduce vibrations.
- Specially hardened knifes.
- Long life bearings.
- Cast iron gearbox single speed 540r/min.
- The main joints are made of highly hardened steel
- Support bracket for easy storage
- Universal 3 points linkage cat. I-II(ø 25.0-22.0/28.0mm).
- EC Conformity.

