




REGOLATORI M202

M202 PRESSURE REGULATORS

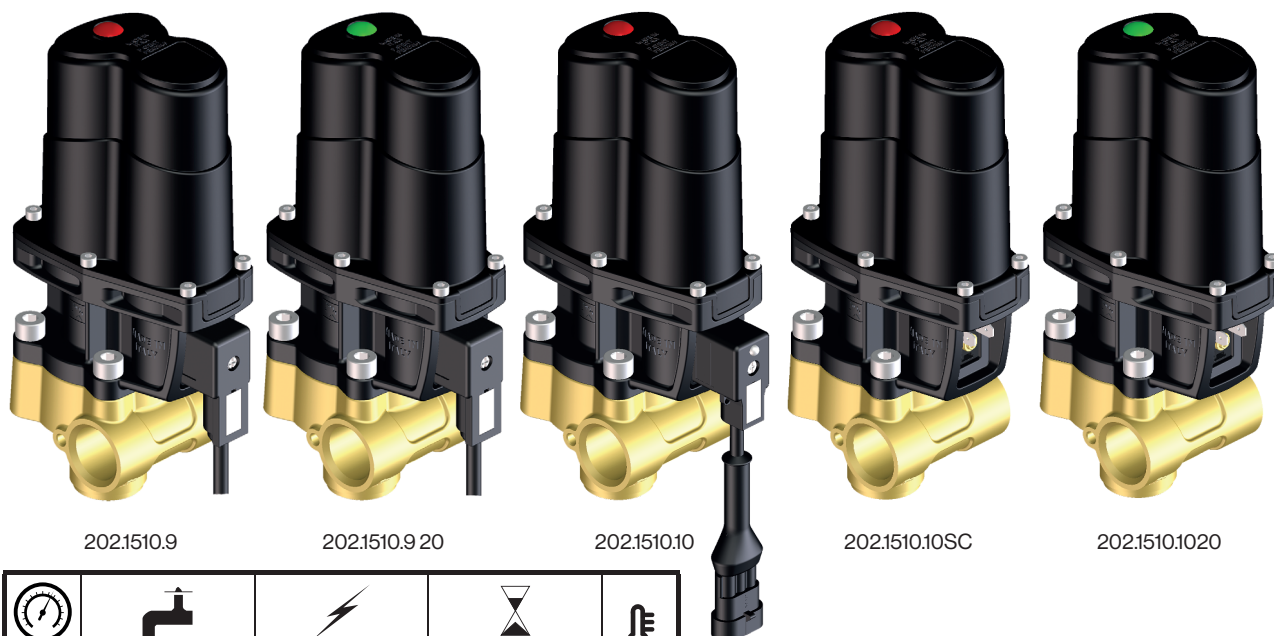

202.1510.9


202.1510.9 20

202.1510.10

202.1510.10SC

202.1510.1020

 bar psi	 l/min (4 bar) USGal/min (60 psi)	 12 - 24Vdc ±2Vdc	 Pmin. Pmax.	
40 580	202.1510.9 (KIT CONTROL 200)			-10°C +80°C
	202.1510.10 (SMARTSPRAY - DATASPRAY - KIT CONTROL 203)			
	202.1510.10SC (CLEVERSPRAY)			
	150 39.5	0.6 - 2A	14 s	
20 290	202.1510.9 20 (KIT CONTROL 200)			-10°C +80°C
	202.1510.1020 (CLEVERSPRAY)			
	150 39.5	0.6 - 1.5A	13 s	

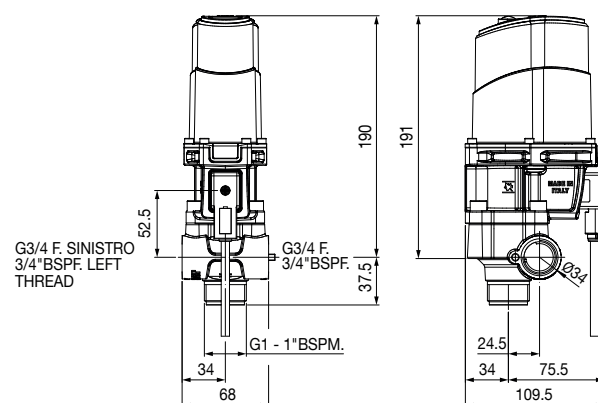

Peso: 202.1510.9/202.1510.9 20 2.11 Kg - 202.1510.10 2.1 Kg - 202.1510.10SC/202.1510.1020 2.02 Kg

Materiali: ottone - acciaio inox - acciaio inox temprato in vuoto - alluminio con rivestimento cataforesi - materiali plastici ad alta resistenza - tenute in FPM

Impiego: su atomizzatori e gruppi irroranti. Valvola di regolazione motorizzata 12-24Vcc a pressione costante. Modulare con le valvole serie M200. Membrana di separazione ed oring interposti tra fluido e componenti interni. Fine corsa incorporato. Regolazione manuale e assistita da computer. Elevata sensibilità, precisione e ripetibilità. Modificando il numero delle mandate in lavoro, la pressione subisce una variazione entro il 10% del valore impostato. Portata minima in scarico: 15 l/min.

Weight: 202.1510.9/202.1510.9 20 2.11 Kg (4.65 lb) - 202.1510.10 2.1 Kg (4.63 lb)
202.1510.10SC/202.1510.1020 2.02 Kg (4.45 lb)

Materials: brass - stainless steel - vacuum hardened stainless steel - aluminium with cataphoresis coating - high resistance plastic materials - FKM seals

Use: on airblast sprayers. Constant pressure 12-24Vdc motor driven pressure regulating valve. Modular with M200 valve series. Diaphragm and o ring separates fluid from moving parts. On board electronic limit switches. Excellent for both manual and computer driven pressure regulation. High sensitivity, accuracy and repeatability. When section valves are switched off, holds constant working pressure between 10% variation. Minimum discharge flow rate: 15 l/min (3.96 USGal/min).

COME SI ORDINA / HOW TO ORDER

CODICE code	P.MAX bar (psi)	CONNETTORE connector	KIT RICAMBIO spare parts kit
202.1510.9	40 (580)	EN175301-803 B 11mm 1.5 m	202.302.76
202.1510.9 20	20 (290)	EN175301-803 B 11mm 1.5 m	
202.1510.10	40 (580)	EN175301-803 B 11mm + Tyco SS 3P 282105-1 0.75 m	
202.1510.10SC	40 (580)	-	
202.1510.1020	20 (290)	-	