





M401
M410
M411

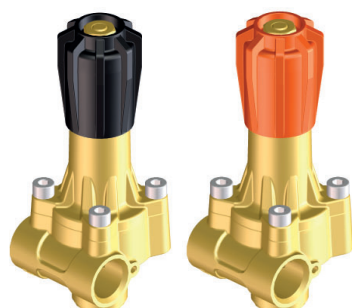


401.1510.7

401.1510.7 20






410.1510.1

410.1510.2



411.1510.3

411.1510.4



M401: standard con una entrata G3/4F. sinistro e una entrata G3/4F. destro. Scarico G1M.

Portata max.: 150 l/min con pressione residua 4 bar

Peso: 1.3 Kg

Materiali: ottone - acciaio inox temprato in vuoto - membrana in FPM - tenute in NBR - materiali plastici ad alta resistenza.

Impiego: su atomizzatori e gruppi irroranti. Per il completamento delle configurazioni con valvole serie M200. Regolazione della pressione mediante by-pass a membrana con variazione della pressione entro $\pm 10\%$ modificando il numero delle sezioni di mandata in lavoro. I materiali impiegati garantiscono resistenza e durata.

M401: standard with 3/4" BSPF. left thread inlet and 3/4" BSPF. inlet. 1" BSPM. flow back

Max. flow rate: 150 l/min (39 USGal/min) with 4 bar (58 psi) pump circuit residual pressure

Weight: 1.3 Kg (2.9 lb)

Materials: brass - stainless steel vacuum hardened - FKM diaphragm - Buna N seals - high resistance plastic materials.

Use: on airblast sprayers. Best suited to complete M200 series valve assemblies. Diaphragm by-pass. Pressure variation within $\pm 10\%$. The materials used provide strength and durability.

M410 - M411: standard completi di tappo G1/4M. - Manometro non fornito

Portata max.: 150 l/min con pressione residua 1 bar

Peso: G3/4F. 1.46 Kg

G1M. 1.38 Kg

Materiali: ottone - acciaio inox - acciaio inox temprato in vuoto - tenute in FPM - materiali plastici ad alta resistenza

Impiego: su atomizzatori, gruppi irroranti e macchine per il trattamento a tutto campo. Regolazione della pressione con by pass del liquido in eccesso. Utilizzabili anche come valvole di massima pressione e sovrappressione. La qualità dei materiali impiegati garantiscono resistenza e durata.

M410 - M411: standard with 1/4" BSPM. Plug - Pressure gauge not supplied

Max. flow rate: 150 l/min (39 USGal/min) with 1 bar (14.5 psi) pump circuit residual pressure

Weight: 3/4" BSPF. 1.46 Kg (3.22 lb)

1" BSPM. 1.38 Kg (3.04 lb)

Materials: brass - stainless steel - vacuum hardened stainless steel - FKM seals - high resistance plastic materials

Use: on boom and air blast sprayers. Pressure adjustment by passing excess liquid. Pressure relief valves. Accurate pressure adjusting. Wear and damage proof.

COME SI ORDINA / HOW TO ORDER

CODICE code	PRESSIONE pressure	ENTRATA A inlet	ENTRATA A1 inlet	SCARICO B discharge	C mm	KIT RICAMBIO spare parts kit
401.1510.7	40 bar (580 psi)	G3/4F. - 3/4" BSPF.	G3/4F. sx - 3/4" BSPF. left	G1M. - 1" BSPM.	190	401.302.64
401.1510.7 20	20 bar (290 psi)	G3/4F. - 3/4" BSPF.	G3/4F. sx - 3/4" BSPF. left	G1M. - 1" BSPM.	190	401.302.64
410.1510.1	25 bar (360 psi)	G3/4F. - 3/4" BSPF.	-	G3/4F. - 3/4" BSPF.	197.5	411.302.158
410.1510.2	50 bar (725 psi)	G3/4F. - 3/4" BSPF.	-	G3/4F. - 3/4" BSPF.	197.5	411.302.158
411.1510.3	25 bar (360 psi)	G3/4F. - 3/4" BSPF.	-	G1M. - 1" BSPM.	181.5	411.302.158
411.1510.4	50 bar (725 psi)	G3/4F. - 3/4" BSPF.	-	G1M. - 1" BSPM.	181.5	411.302.158