





M84 CLAMP Ø22 QUICK CAPS



84.617.90

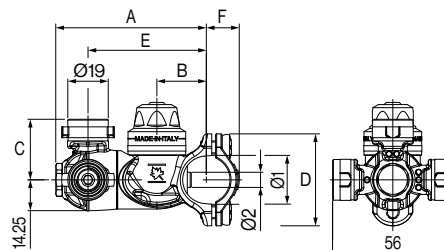

Standard completo di cavallotto, viti inox e O Ring. Ghiere Quick Caps ed ugelli non compresi

Pressione di esercizio max.: 25 bar (pressione max. ugelli impiegati)

Peso: 326 g

Materiali: ottone - acciaio inox - NBR - FPM - PVC

Impiego: su atomizzatori. Montaggio diretto sul collettore di mandata. Ingresso Ø7 in acciaio inox. Compatibile con tubi Ø1/2" (Ø21.3mm) e Ø22. Tre attacchi per ghiere Quick Caps Ø19 per allineamento automatico (10°) ugelli antideriva a ventaglio. Tre ugelli selezionabili con posizioni intermedie di chiusura. Tre posizioni "APERTO" inclinate ±20° dalla verticale. Ogni posizione è segnalata da uno scatto. Antigoccia resistente ed efficace a bassa e ad alta pressione.

Standard supplied with clamp, s.steel screws and O Ring. Quick Caps and spray tips not included

Max. operating pressure.: 25 bar (370 psi) (max. spray tips operating pressure)

Weight: 326 g (11.5 oz)

Materials: brass - stainless steel - Buna N - FKM - PVC

Use: for agriculture use on air blast sprayers. Direct mounting on sprayer manifolds. Ø7 mm stainless steel inlet connection. Fits Ø1/2" (Ø21.3mm) and Ø22 mm pipes. Three Ø19 Quick Caps connections for anti-drift fat fan spray tips automatic alignment (10°). Very compact. Rollover to select spray tips with two shut off positions. Three "OPEN" positions at ±20° from vertical. A click point out each position. Anti drip valve with efficient and long lasting operations at low and high pressures.

COME SI ORDINA / HOW TO ORDER

CODICE code	Ø1 mm	Ø2 mm	A	B mm	C mm	D mm	E mm	F mm	ORDINE MINIMO minimum order	KIT RICAMBIO spare parts kit
84.617.90	Ø21.3 - Ø22	Ø7	70	23	28	42.5	55	15.5	10	84.302.29