


## TFVJHPR · OVENS ·

## PROFESSIONAL HYDRAULIC MULCHER FOR SKID STEERS

The TFVJHPR model is designed to handle high performance and heavy-duty work. Its structure and composition allows the attachment to clear brush up to 25 cm [10 inch] in diameter. Its double chassis is made of SCM-500 high yield strength steel, with two counter-blades to assist the mulching operation. Its hydraulic motor and the hydraulic drive for opening the rear door is all protected. The ergonomic design of the head allows an excellent visibility to the operator.

Ø max. 25 cm [10] inch]





Mulches wood and brush up to 25 cm [10 inch] Reinforced frame with High Yield Steel SCM.500 Universal Hitch (standard)

Transmission with belts type 'B' profile

Hydraulic motor drive (Fixed or variable displacement)

Hydraulic reinforced rear door

Double chain protection for the operator and the environment

Fixed hammers with double tip of Tungsten Carbide (Widia)

Double tempered counter-knife

Reinforced skids, adjustable height.



## **OPTIONS PRODUCT**

Hydraulic Rear door Mechanical Rear Pushing bar Hydraulic Rear Pushing bar Electric valve for opening the rear door. Hydraulic Piston motor












## **DATA EQUIPMENT**

Working width	[cm]	130	150	180	200	225
Total width	[cm]	158	178	208	228	248
Flow Rate	[l/min]	90 – 180	90 – 180	90 – 180	90 – 180	90 - 180
Pressure	[bar]	190 – 230	190 – 230	190 – 230	190 – 230	190 - 230
Weight	[Kg]	1195	1295	1395	1495	1595
Weight (MOD. B)	[Kg]	1238	1367	1452	1567	1680
Belts	[nº]	4	4	4	4	4
Rotor diameter*	[mm]	470	470	470	470	470
Fixed hammers	[nº]	20+2**	24+2	28+2	32+2	34+2
Fixed hammers (MOD. B)	[nº]	26+2**	34+2	36+2	42+2	46+2

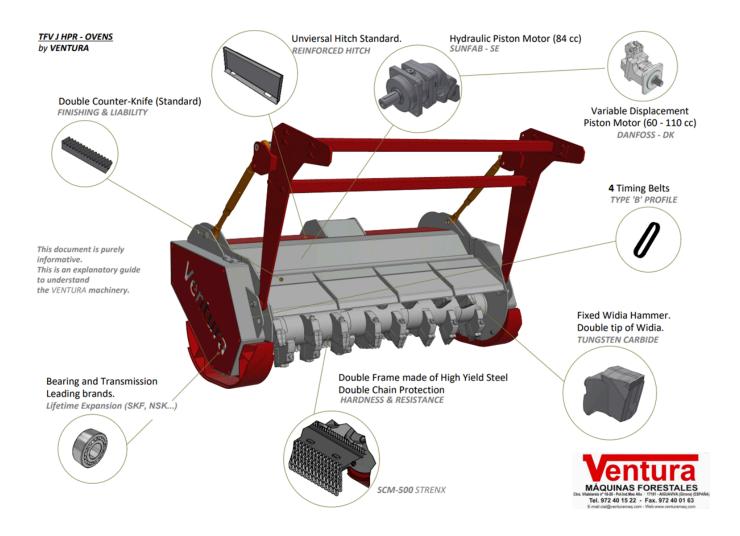

This document is purely informative. This is an explanatory guide to understand the VENTURA machinery.

EMAIL

**WEB** 

info@venturamaq.com