




Ventura

FORESTRY MACHINES

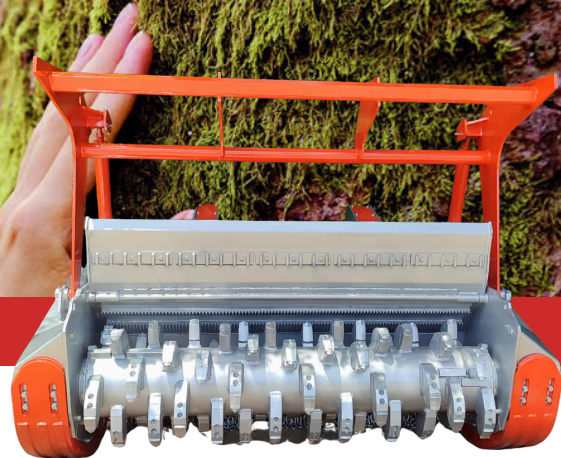

TFMF - MADEIRA

PROFESSIONAL FORESTRY MULCHER FOR 200 TO 400 HP TRACTORS

The TFMF model is designed for high performance and heavy-duty work. It can be used with tractors from 200 to 400 HP. Its structure and composition enable the attachment to clear brush up to 50 cm in diameter. Its frame is made from SCM-500 high-strength steel, with two counter-blades to facilitate mulching and an additional counter-blade in the rear door. Its robust freewheel gearbox is protected. The ergonomic design of the shredder ensures excellent operator visibility, high cutting efficiency and long tool life.

STANDARD DATA



max. 50 cm
[20 inch]



200 - 400 HP

- Grinds wood and brush up to 50 cm [20 inches].
- Frame reinforced with high-performance SCM.500 steel.
- Bondioli & Pavesi freewheel gearbox
- Transmission via 10 profiled 'B' belts
- Double traction system
- Third point category II - III
- Reinforced rear hydraulic door
- Double chain protection
- Cutting hammers with tungsten carbide tips (Widia)
- Double-hardened counter-knife
- Counter-knife in rear door
- Reinforced skids, adjustable height
- Adjustable orientation box



PRODUCT OPTIONS

- Gearbox with torque limiter
- Mechanical rear push bar
- Hydraulic rear push bar
- Reinforced hydraulic rake for rear push bar
- Skids for deep work
- Reinforced hammer with two wings
- Centrifugal clutch (start-up operation)
- Adjustable 3-point linkage



<https://www.youtube.com/watch?v=8gVrGvpQPWI&t=2s>



TECHNICAL DATA

Working width	Cm / inch	200 / 79	225 / 89	250 / 98
Total width	Cm / inch	246 / 97	271 / 107	296 / 117
Power tractor	HP	200 – 400	200 – 400	200 - 400
PTO	RPM	1000	1000	1000
Weight	Kg/lb	3732 / 8228	4032 / 8889	4332 / 9550
Belts	N.º	10	10	10
Diameter rotor	Cm/inch	67.5 / 26.6	67.5 / 26.6	67.5 / 26.6
Fixed hammers	N.º	52+2**	60+2	68+2

*The rotor diameter shown in the table corresponds to the rotor fitted with the standard hammer.

**Each VENTURA rotor is equipped with two special side hammers.

Ventura hammers: Widia standard hammer / Widia double reinforced hammer.



TF MF 'MADEIRA' by VENTURA

OPTIONAL REAR PUSHING BAR
HYDRAULIC or MECHANICAL

REPLACEABLE PUSH RAKE (OPTION)

Forestry Gearbox Bondioli & Pavesi -
Free Wheel

OPTIONS: TRANS. 1000 RPM...



12 Timing Belts
TYPE 'B' PROFILE



STANDARD REINFORCED SKID WITH
HB-400 ANTIWEAR STEEL

Double heavy duty - Chain Protection
Frame made of High Yield Steel

HARDNESS & RESISTANCE
SCM-500 STREX



Double Counter-Knife (Standard)
FINISHING & LIABILITY



Bearing and Transmission
Leading brands.
Lifetime Expansion (SKF, NSK...)



Fixed Widia Hammer.
Double tip of Widia.
TUNGSTEN CARBIDE

This document is purely informative. This is an explanatory guide to understand the VENTURA machinery.

EMAIL

info@venturamaq.com

WEB

www.venturamaq.com