



Ventura

MÁQUINAS FORESTALES



TFVNMFH - MEKONG

HYDRAULIC HEAD FOR EXCAVATORS FROM 5 - 12 TN

The TFVNMFH model is planned to handle high performance in forestry conditions. Equipped to reach efficiency, with his light weight can be fitted on mini excavators from 5 to 12 tones. Its light but robust composition allows the attachment to clear bushes and trunks up to 15 cm [6 inch] in diameter. Its chassis is made of SCM-500 high yield strength steel, with two counter-blades to assist the mulching operation.



max. 15 cm [6
inch]



440 / 480 KG
970 - 1060 LB

STANDARD DATA

Mulches wood and brush up to 15 cm [6 inch]
Reinforced frame with High Yield Steel SCM.500
Hydraulic gear motor Roquet (36 CC)
Transmission with belts type 'B' profile
Hydraulic rear door reinforced.
Chain protection for the operator and the environment security
Cutting hammers with double tip of Tungsten Carbide (Widia)
Double tempered counter-knife
Reinforced skids with HB-400 anti-wear steel.
2 - 3 hydraulic lines.



OPTIONS PRODUCT


Mechanical rear door
Attachment for excavator arm. Or plate
Rotation plate
Ripper
Hydraulic piston motor (47 – 64 CC)



TECHNICAL DATA

| | | | |
|---------------------|------------|------------------------|------------------------|
| Working width | cm/inch | 100/39 | 120/47 |
| Overall width | cm/inch | 128/50 | 148/58 |
| Excavator tones | TN / inch | 5-12 / 11.023 – 26450 | 5-12 / 11.023 – 26450 |
| Oil flow | l/min /gpm | 60 – 85 / 16 - 23 | 60 – 85/ 16- 23 |
| Pressure | Bar/psi | 190 – 230/ 2756 - 3191 | 190 – 230/ 2756 - 3191 |
| Weight | Kg/lb | 440/970 | 480/1058 |
| Belts | Nº | 3 | 3 |
| Rotor diameter | cm/inch | 40 / 15.5 | 40 / 15.5 |
| Widia fixed hammers | Nº | 20 | 24 |

TFVNMFH
by VENTURA

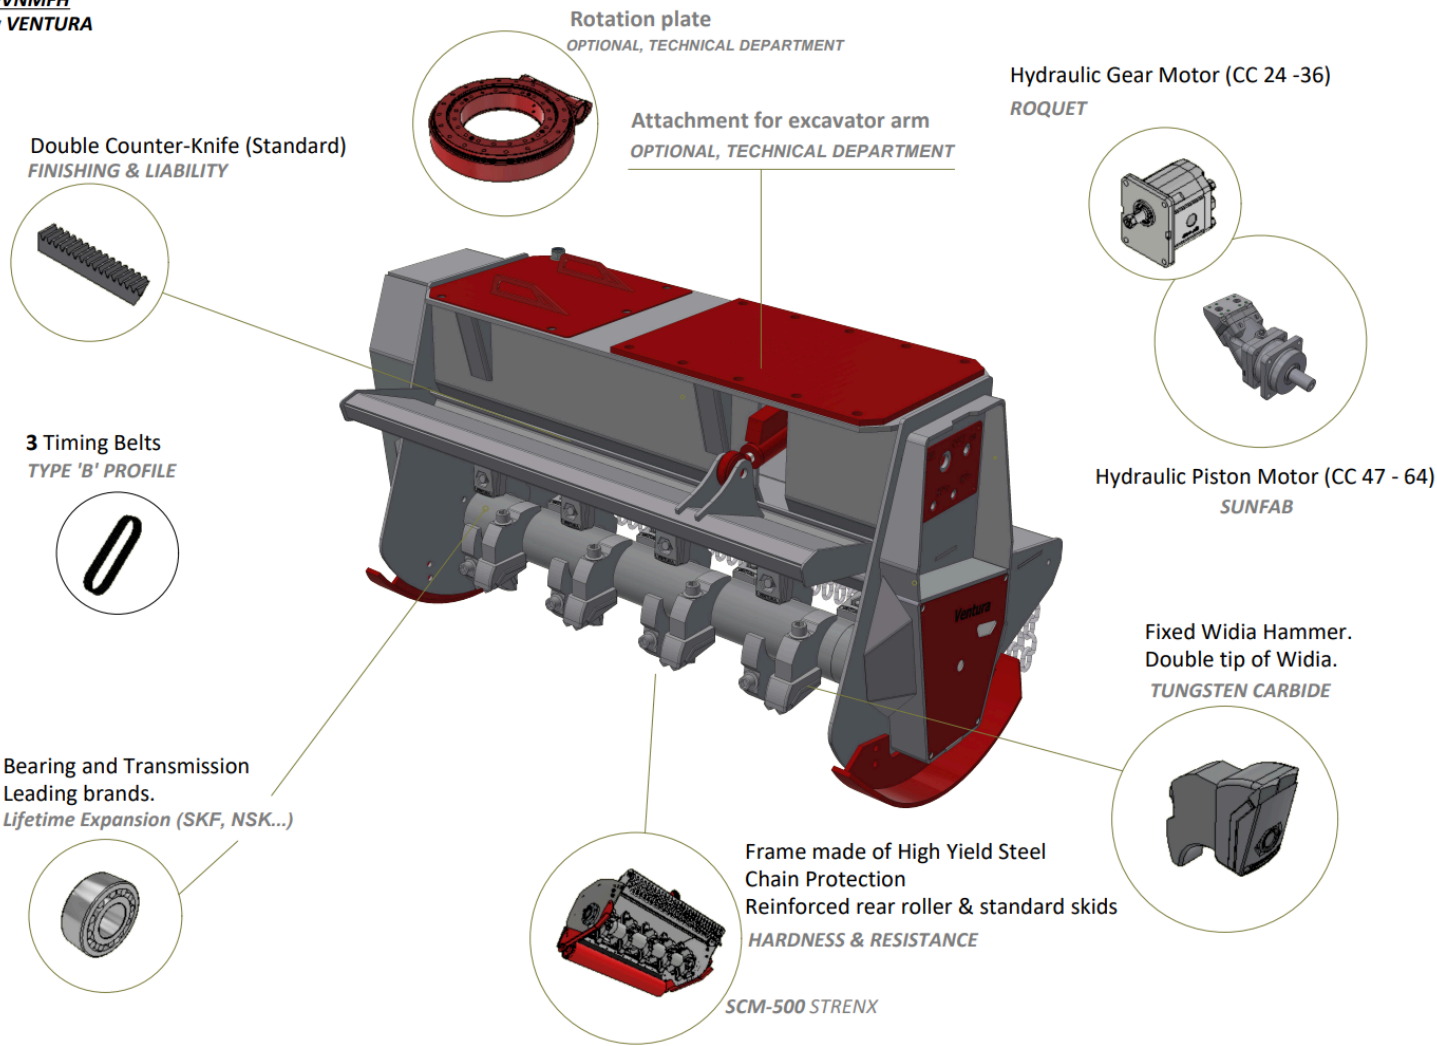

This document is purely informative. This is an explanatory guide to understanding the VENTURA machine.

EMAIL
info@venturamaq.com

WEB
www.venturamaq.com