




COMPATTATORE

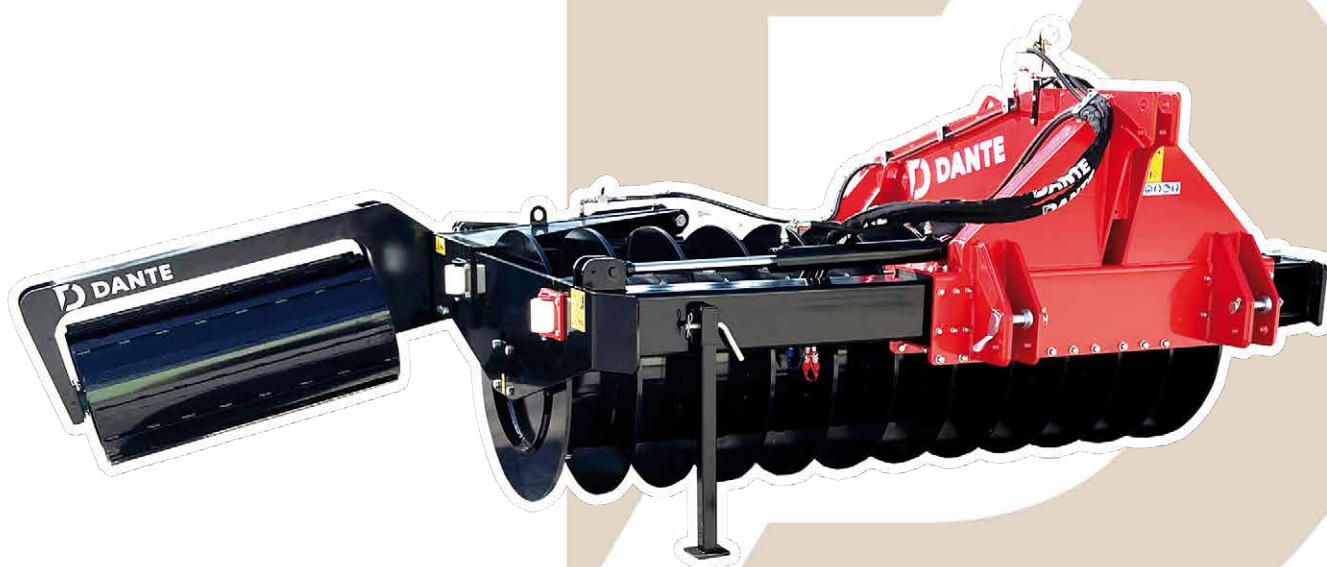

ARGO

ARGO



ITA

Argo, agganciato al sollevamento posteriore, coadiuva in maniera molto importante il lavoro di compattamento fatto dal trattore.

Costipare in modo omogeneo, su tutta la larghezza e in profondità grazie agli anelli del rullo significa avere la certezza di eliminare l'aria presente fra il materiale trinciato così da ridurre drasticamente la formazione di muffe. Ciò consente una maggiore resa per gli impianti di biogas e biometano, ma soprattutto una migliore qualità dell'alimentazione animale.

ENG

Argo, attached to the rear lift, significantly assists the tractor's compaction work. Compacting evenly across the entire width and depth thanks to the roller rings means eliminating air from the shredded material, drastically reducing mold formation. This allows for greater yields for biogas and bioenergy plants, but above all, improved animal feed quality.

Modello Model	 mm	 mm	Peso (vuoto) Weight (empty)	Peso (pieno di acqua) Weight (Full of water)	
ARGO	3000	3000	2800 Kg	3700 Kg	250 HP +



Via F.lli Bandiera, 12
Bagnoli di sopra - 35023 (Padova) - Italy
Tel. +39 0495344011
info@dantemacchine.it
www.dantemacchine.it