

Greater range.
More application possibilities.



Mechanical or hydraulic swing-out
of the boom arm
up to 1.93 m
measured from the vehicle center



Detailed information about our
MultiCarrier

km-x.groupschumacher.com/en/multicarrier/

The working width of the carrier can be adjusted from 0.88 - 1.93 m using the parallelogram boom. The MultiCarrier MC190 therefore offers more reach than comparable systems.

The SCH branch cutters and hedge trimmers are mounted on the right in the direction of travel as standard. Mounting on the left is optionally available.

Perfect Cut.

SCHUMACHER GmbH
Siegener Straße 10 · 57612 Eichelhardt / Germany
Phone +49 (0) 2681 8009 - 0 · info@groupschumacher.com

www.groupschumacher.com

GROUP SCHUMACHER



MultiCarrier MC190

THE UNIVERSAL CARRIER SYSTEM

FOR SCHUMACHER BRANCH CUTTERS AND HEDGE TRIMMERS



A collaboration between




MultiCarrier MC190

Carrier system for branch cutters and hedge trimmers

The new MultiCarrier was developed in a collaboration project with our partner company Düvelsdorf from Ottersberg. Thanks to the universal hole pattern of the tried-and-tested D-Lock system, the MC190 is suitable for both the Euro mount and telescopic or yard loaders.

Specially developed for mounting the SCH® KM-L, KM-S and KM-X branch cutters and hedge trimmers, the MultiCarrier guarantees safe and efficient handling.

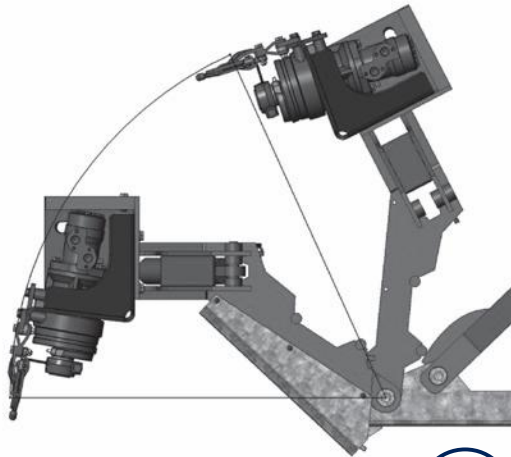

Collision protection

To prevent damage to the carrier vehicle or the shears, the carrier system is equipped with collision protection as standard.



Width adjustment

The working width can be adjusted without tools and allows the boom arm to be swung out from 0.88 to 1.93 m (measured from the vehicle center). This ensures flexible use on different terrains or in confined spaces. A hydraulic adjustment is optionally available at extra cost.



Hose guide

To prevent damage to the hydraulic hoses from falling cut branches, they are protected in the boom arm of the carrier system. This ensures maximum safety.



Düvelsdorf D-Lock attachment

The proven D-Lock system enables universal use so that the MultiCarrier can be equipped with a variety of attachments (e.g. Euro hitch) for tractors, telescopic handlers or yard loaders.



Balance weights

Using individual plates, the counterweight can be configured individually depending on the machine type. Each plate weighs 13 kg.



Angle display

The mechanical angle indicator makes it easy to adjust the shears and ensures user-friendly operation.



Parking supports

A specially designed holder allows the removable support legs to be carried along. A holder for the knife guard is included as well.



Technical data

MultiCarrier MC190			
Transport width	1.63 m		
Weight	155 kg (without shear)		
Collision protection	50 kg release force	45° to the rear	450 – 750 mm retraction path
Width adjustment	5-stage from 0.88 – 1.93 m		
Working angle scissors	10° to+ 100°		
Balance weights	Gradually expandable 50 – 130 kg		
Applicable shears (working width)	KM-X up to 1.70 m	KM-S up to 1.80 m	KM-L up to 1.65 m
Oil quantity/pressure KM-X	40 – 60 l / min at 230 bar		
Oil quantity/pressure KM-S+ KM-L	10 – 40 l / min at 140 – 175 bar (depending on working width)		

Subject to technical changes

Well thought out
down to the last detail.