




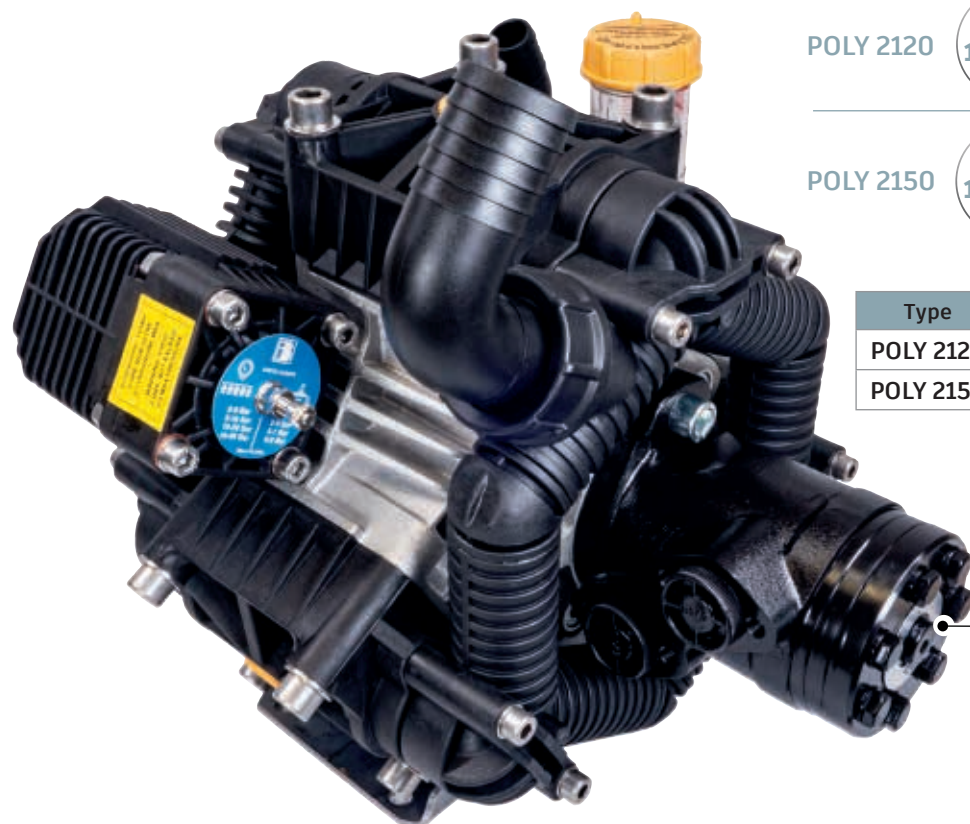

POLY 2120



POLY 2150



Type	Cod.
POLY 2120	62.8006.97.3DS
POLY 2150	62.8007.97.3DS

Caratteristiche - Specifications - Características		POLY 2120	POLY 2150
Giri al min. - R.P.M.		550	550
Potenza - Power - Potencia		3,6 kW (4.8 hp)	4,2 kW (5.6 hp)
Peso - Weight - Peso		25,6 kg (56.3 lb)	25,6 kg (56.3 lb)
Dislivello di aspirazione Negative pressure Desnivel aspiración	MAX	1,5 mt (4.9 ft)	1,5 mt (4.9 ft)
	Servizio discontinuo Discontinuous service Servicio discontinuo	3 mt (9.8 ft)	3 mt (9.8 ft)
D. aspirazione - Intake d. - D. Aspiración		40 mm (1" 9/16)	40 mm (1" 9/16)
D. mandata - High pressure d. - D. envío		25 mm (1")	25 mm (1")
Temperatura - Temperature (MAX)		60°C (140°F)	60°C (140°F)
Tipo olio - Oil type - Tipo de aceite		SAE 30 / W 30	SAE 30 / W 30
Capacità olio - Oil capacity - Capacidad aceite		1 lt (0.26 USG)	1 lt (0.26 USG)

POLY 2120 Rendimenti - Performance - Rendimientos


Giri al min. R.P.M.	400			450			500			550		
	bar	l/min	kW	bar	l/min	kW	bar	l/min	kW	bar	l/min	kW
	PSI	US GPM	hp	PSI	US GPM	hp	PSI	US GPM	hp	PSI	US GPM	hp
2		92	0,4	30,0	103	0,4	30,0	115	0,4	30,0	126	0,5
		29	24,2	0,5	435,0	27,2	0,5	435,0	30,3	0,6	290,0	33,3
5		91	0,9	40,0	102	1,0	40,0	114	1,1	40,0	125	1,2
		72,5	24,0	1,2	580,0	27,0	1,3	580,0	30,0	1,5	580,0	33,0
10		90	1,8	70,0	101	2,0	70,0	113	2,2	70,0	124	2,4
		145	23,8	2,4	1015,0	26,8	2,7	1015,0	29,8	3,0	1015,0	32,8
15		89	2,6	90,0	100	3	90,0	111	3,3	90,0	122	3,6
		218	23,4	3,5	1305,0	26,4	3,9	1305,0	29,3	4,4	1305,0	32,2

Alimentazione motore - Motor supply - Alimentación motor
20÷35 l/min - 5.3÷9.3 US GPM

POLY 2150 Rendimenti - Performance - Rendimientos

Giri al min. R.P.M.	400			450			500			550		
	bar	l/min	kW	bar	l/min	kW	bar	l/min	kW	bar	l/min	kW
	PSI	US GPM	hp	PSI	US GPM	hp	PSI	US GPM	hp	PSI	US GPM	hp
2		109	0,4	30,0	123	0,5	30,0	136	0,5	30,0	150	0,6
		29	28,8	0,6	435,0	32,4	0,6	435,0	36,0	0,7	435,0	39,6
5		108	1,1	50,0	121	1,2	40,0	135	1,3	50,0	148	1,5
		72,5	28,4	1,4	725,0	32,0	1,6	580,0	35,5	1,8	725,0	39,1
10		105	2,1	80,0	119	2,3	80,0	132	2,6	80,0	145	2,8
		145	27,9	2,8	1160,0	31,3	3,1	1160,0	34,8	3,5	1160,0	38,3
15		104	3,1	110,0	117	3,4	120,0	130	3,8	120,0	143	4,2
		218	27,5	4,1	1595,0	30,9	4,6	1740,0	34,3	5,1	1740,0	37,8

Alimentazione motore - Motor supply - Alimentación motor
20÷35 l/min - 5.3÷9.3 US GPM

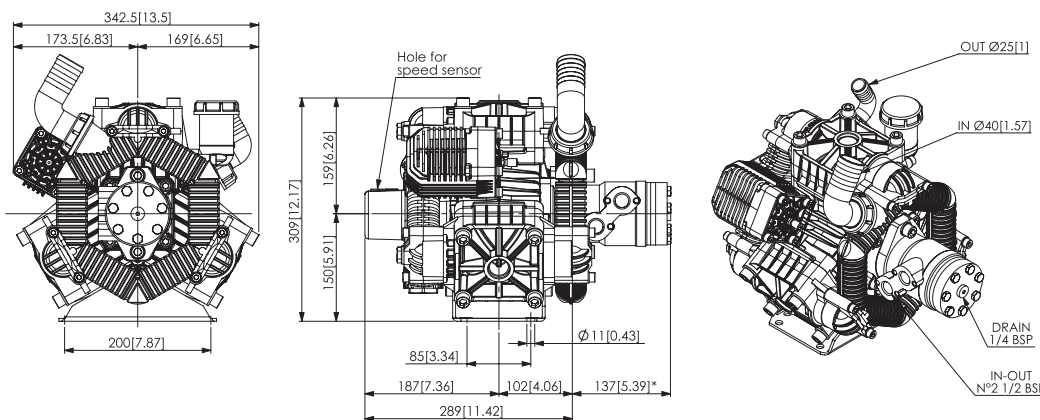

*:Ingombro del motore indicativo - Approximate motor dimensions - Dimensiones aproximadas del motor