

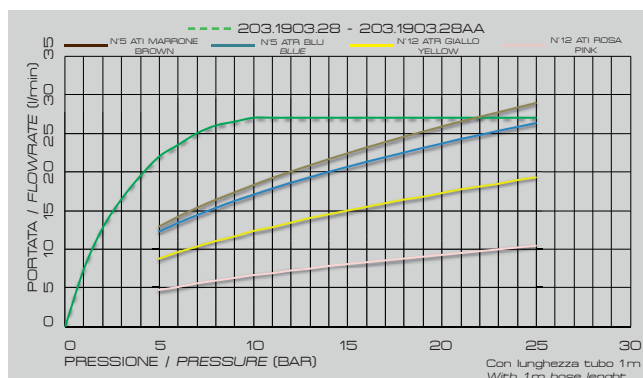


**M203**Brevettato
Patented

203.1903.28

203.1903.28AA

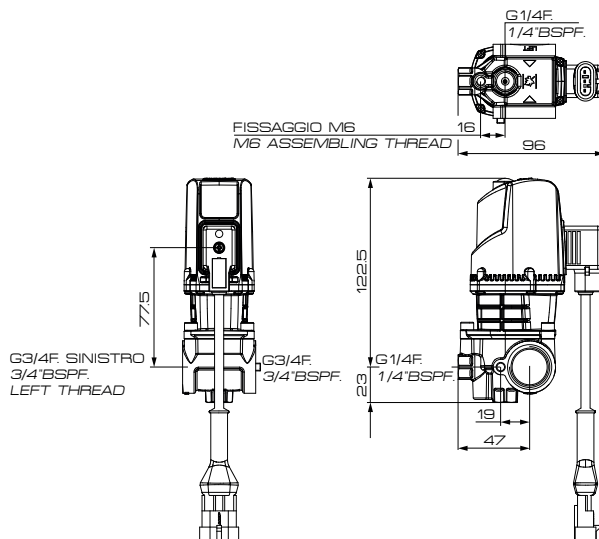

bar psi	l/min (1 bar) USGal/min (15 psi)	12Vdc +2Vdc	On Off	Key
25 362	7.5 1.98	0.2A - 1.2A	0.2 s ON 0.4 s OFF	-10°C +80°C

Standard con connettore e grano di centraggio

Peso: 0.65 kg

Materiali: ottone - acciaio inox - materiali plastici ad alta resistenza - tenute in FPM

Impiego: su atomizzatori. Valvola di sezione miniaturizzata. Azionamento con motore 12Vcc a basso assorbimento. Chiusura a membrana. Modulare e configurabile anche con le valvole ed i componenti della serie M200. Fine corsa elettronico incorporato. Controllabile con: kit control manuali 180 e 203 - SmartSpray - DataSpray. Massima flessibilità di montaggio ed impiego. Installabile sulla struttura del convogliatore aria in prossimità dei portaugelli. E' possibile alimentare anche il singolo portaugello fisso o spostabile. Due mandate configurabili G1/4F. per raccordi rapidi pneumatici standard per tubi PA11 PA12 PHL / HIPL. Ø interno minimo tubo: 6 mm.

Standard with connector and connecting dowel

Weight: 0.65 kg (1.4 lb)

Materials: brass - stainless steel - high resistance plastic materials - FKM seals

Use: for agricultural use on airblast sprayers. Compact size section valve driven by low consumption 12VDC motor. Diaphragm shut-off. Modular assembling also with M200 valves and parts. Electronic on board limit switches. Operated by: 180 and 203 series manual control kits - SmartSpray - DataSpray. Easy to assemble also on air blowers and towers chassis in proximity of the nozzle holders (with fixed or adjustable spacing). Even the single nozzle holder can be operated. Two 1/4" BSPF. configurable outputs for standard pneumatic quick connections and PA11 PA12 PHL / HIPL hoses. Hose minimum internal Ø: 6 mm.

COME SI ORDINA / HOW TO ORDER

CODICE code	VERSIONE model	FINE CORSA limit switch	CONNETTORE connector	KIT RICAMBIO spare parts kit
203.1903.28	3 FILI / 3 WIRES	ON BOARD	EN175301-803 B 11mm 0.75 m	203.302.112
203.1903.28AA	2 FILI / 2 WIRES	ON BOARD	EN175301-803 B 11mm 1.5 m	